1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

AQPU (grey round) Wheel Diameter × Wheel Width 125 x 40mm

EAN

YJ-11510500602023

Swivel castor, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Top Plate (4T) Mounting Type device Aluminum core, High Quality Polyurethane Wheel Tread Gray, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm 205mm Swivel Interference Overall Height 155mm **Swivel Radius** 102.5mm Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 230kgs
Load Capacity (Static) 345kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.58kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

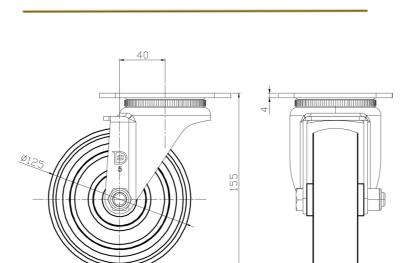

Mounting

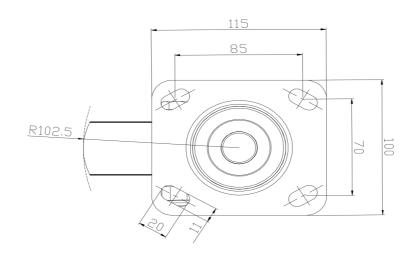

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.