

1151 51 European Standard Base Plate Series

AQPU Wheel (Brown Arc) Diameter x Width 125x40mm


A

YJ-11510500602033

Swivel Casters, Riveted and Stamping Top Plate brackets—44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacings
 Zinc-Plated surface, Top Plate type (4T) Mounting Type device
 Aluminum core, High Quality Polyurethane Wheel Tread
 Gray, Bearing—Ball Bearings.

Wheel Tread: High-Quality Polyurethane
 Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

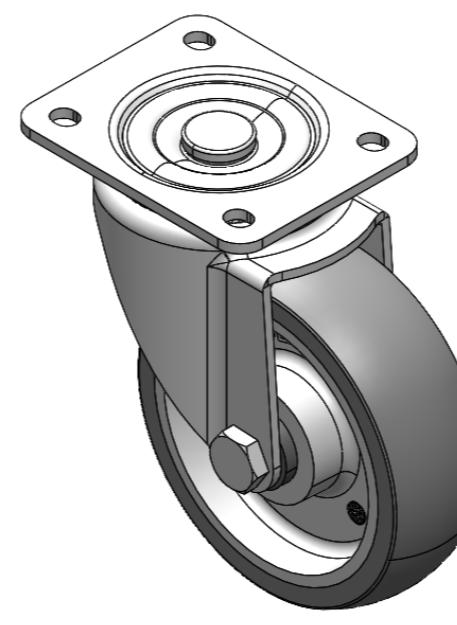

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 125mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 105 x 85mm

Bolt Hole Spacing 80 x 60mm

Plate Hole 10.5 x 9mm

Offset 40mm

Swivel Interference 205mm

Overall Height 155mm

Swivel Radius 102.5mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 230kgs

Load Capacity (Static) 345kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.48kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

Dimensions

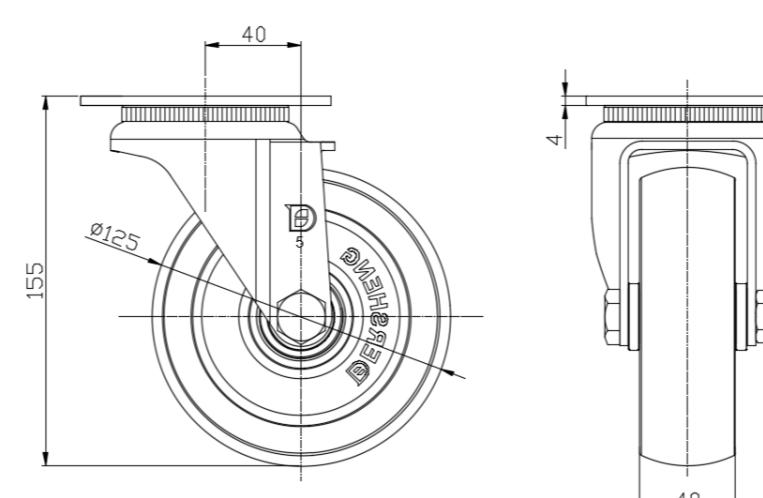

Mounting

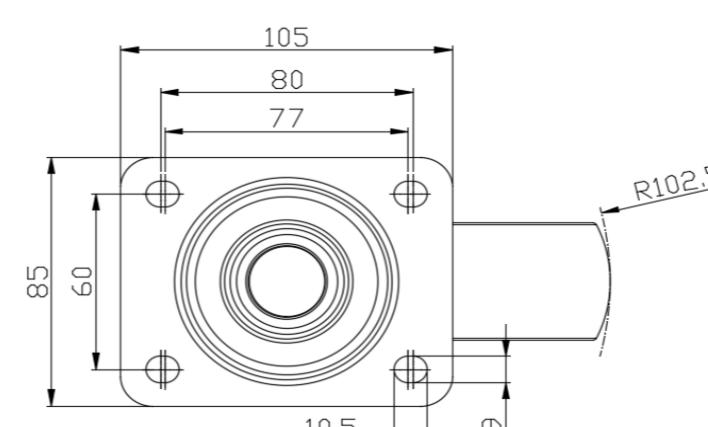

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com