# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series



SX Rubber Wheel Diameter × Wheel Width 150 x 45mm

EAN

YJ-11510600032013

Swivel Caster, Top Plate with Riveted Stamping bracket and D-shaped hole. Zine-Plated, Top Plate (4T) Mounting Type system. Cast Iron Wheel Center with High-Quality Resilient Rubber tread. Black, Bearing with Ball Bearing.

Wheel Tread: high-quality elastic rubber

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm 230mm Swivel Interference Overall Height 188mm **Swivel Radius** 115mm Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 220kgs
Load Capacity (Static) 330kgs

Temperature -20°C to +120°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.60kgs


Standard ISO22883

#### Advantages at a glance


Rolling Resistance
Operating Noise

Floor Surface Preservation • • • • ○

### Dimensions

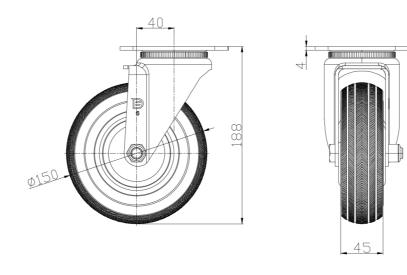

## Mounting

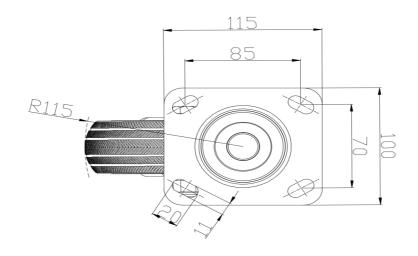

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.