1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

MRC (Transparent) Wheel Diameter × Wheel Width 150 x 40mm

EAN

YJ-11510600072013

Swivel Caster, Top Plate Riveted Stamping Fork - D-type hole Surface Zine-Plated, Top Plate type (4T) Mounting Type device Reinforced Polypropylene and Wheel Tread Transparent, Bearing - Ball Bearing.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm 230mm **Swivel Interference** Overall Height 188mm **Swivel Radius** 115mm Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 350kgs

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

1.77kgs

Standard

ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

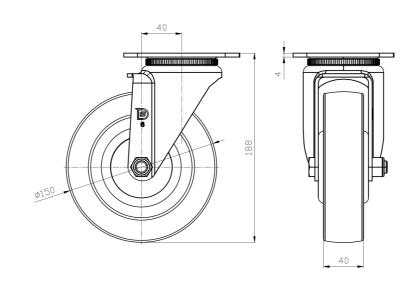

Mounting

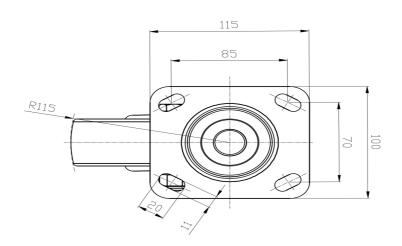

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.