# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series



WMRC (Transparent) Wheel Diameter × Wheel Width 150 x 40mm

EAN

YJ-11510600072023

Swivel Casters, Top Plate Riveted Stamping Fork - D-type hole Surface Zine-Plated, Top Plate type (4T) Mounting Type device Reinforced thermoplastic plastic Wheel Center and Wheel Tread Bearing - Ball Bearing.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm 230mm Swivel Interference Overall Height 188mm **Swivel Radius** 115mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 350kgs
Load Capacity (Static) 525kgs

Temperature -20°C to +80°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.62kgs

Standard ISO22883

#### Advantages at a glance

Rolling Resistance


• • •

Operating Noise


• • •

Floor Surface Preservation  $\bullet \circ \circ \circ$ 

#### Dimensions

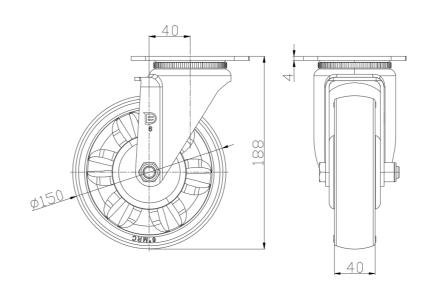

## Mounting

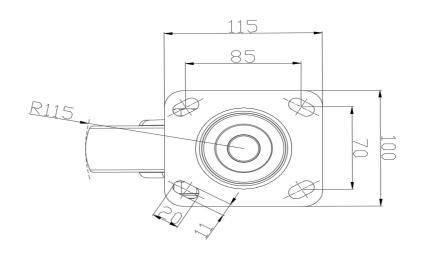

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.