# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU (Red Flat) Wheel Diameter × Wheel Width 150 × 42 mm

EAN


YJ-11510600332013

Swivel Caster with integral Stamping Fork and D-shaped hole. Zine-Plated, Mounting Type - Top Plate. Cast Iron Wheel Center with High Quality Polyurethane tread. Red Cast Iron finish, Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16"

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 3-7/16 "

Bolt Hole Spacing 3-7/16 " x 2-13/16 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "
Swivel Interference 9-1/4 "
Overall Height 7-1/2 "
Swivel Radius 4-5/8 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature -4°F to +158°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.7lbs


Standard ISO22883


## Advantages at a glance

Rolling Resistance


• • • • • • • • • • • • • • Floor Surface Preservation

#### **Dimensions**





## Mounting

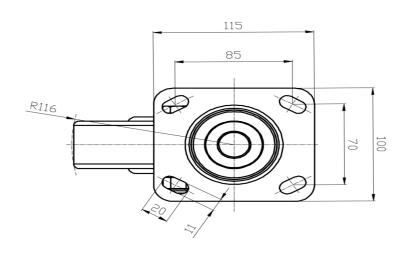

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.