# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

WCPD (White) Wheel Diameter × Wheel Width 150 x 40mm


EAN

YJ-11510600444023

Castors with Total Brake Locking system. Top Plate Riveted Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate (4T) Mounting Type device Polypropylene Wheel Center, Wheel Tread White, Bearing - Ball Bearing

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 48mm 328mm Swivel Interference Overall Height 188mm **Swivel Radius** 164mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 250kgs
Load Capacity (Static) 375kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.74kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

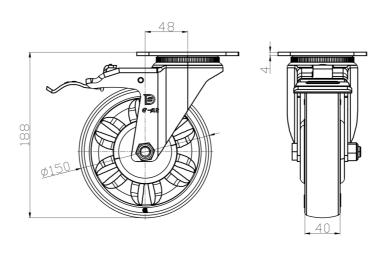

## Mounting

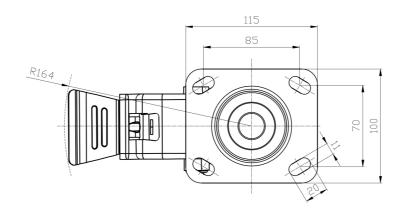

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.