

1151D Heavy Duty 1.5" Wide General Purposes Caster Series



WCPD (White) Wheel Diameter × Wheel Width 150 x 40mm


EAN

YJ-11510600444023

Castors with Total Brake Locking system. Top Plate Riveted Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate (4T) Mounting Type device Polypropylene Wheel Center, Wheel Tread White, Bearing - Ball Bearing

Wheel Tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

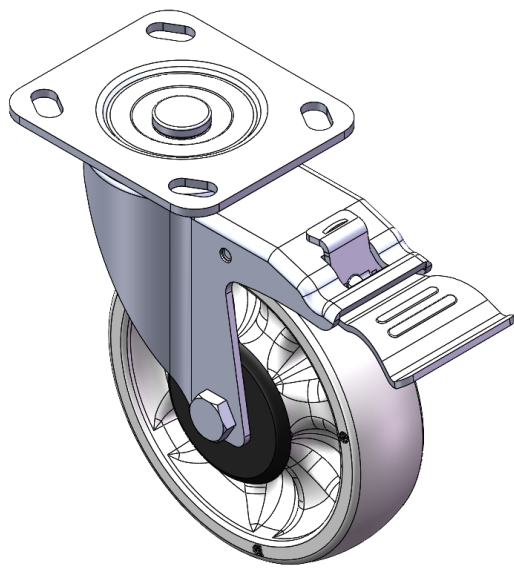

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 6 "                            |
| Wheel Width                                                            | 1-5/8 "                        |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 4 " x 4 "                      |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "              |
| Plate Hole                                                             | 13/16 " x 3/8 "                |
| Offset                                                                 | 1-15/16 "                      |
| Swivel Interference                                                    | 13 "                           |
| Overall Height                                                         | 7-1/2 "                        |
| Swivel Radius                                                          | 6-1/2 "                        |
| Hardness Of Tread                                                      | 72±5° Shore D                  |
| Load Capacity (Dynamic)                                                | 551lbs                         |
| Load Capacity (Static)                                                 | 827lbs                         |
| Temperature                                                            | 4°F to +140°F                  |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 3.8lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

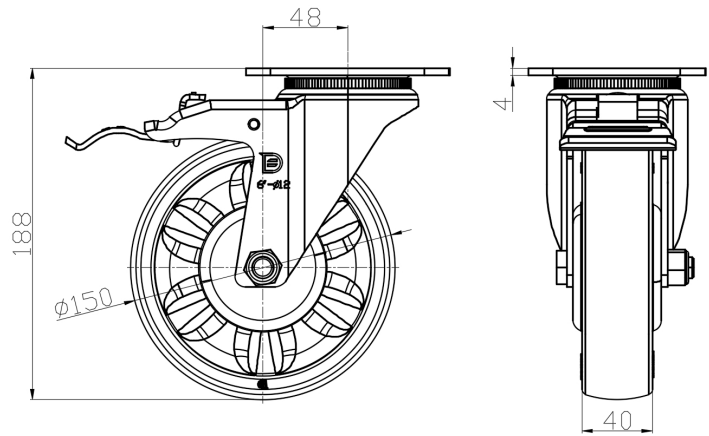

Mounting

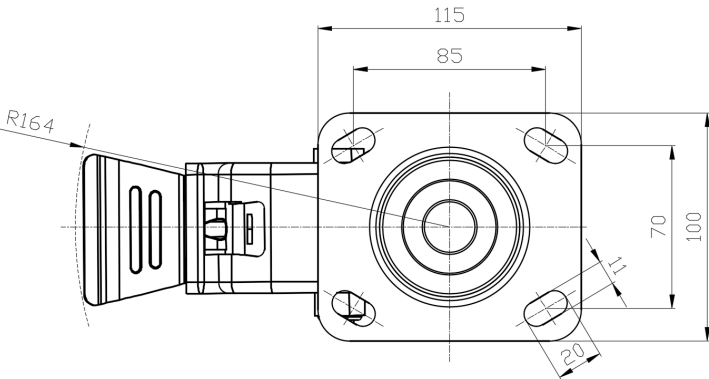

\* For any deviation between metric and imperial spec, please refer to the metric spec.