1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (black, dark gray) Wheel Diameter × Wheel Width 150 x 38mm

EAN

YJ-11510600451013

Rigid Caster, Stamping Fabricated Caster Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Extended control lever surface, Top Plate (3.5T) Mounting Type device Reinforced impact-resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing. .

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 38mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 118 x 95.8mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 188mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 180kgs

270kgs

Load Capacity (Static)

Temperature

-20°C to +60°C

Fork Type

Rigid Caster

Stainless

N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.07kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

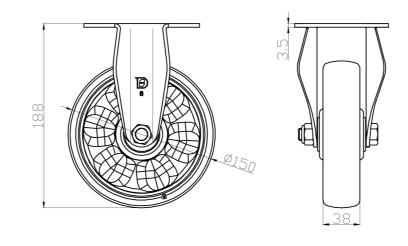

Mounting

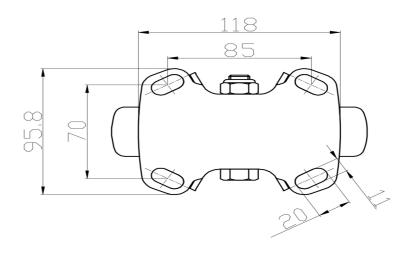

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.