1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (black, dark gray) Wheel Diameter × Wheel Width 150 x 38mm

EAN

YJ-11510600452013

Swivel castor, Top Plate Riveted Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate (4T) Mounting Type device Reinforced impact resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Dark grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Load Capacity (Static)

Wheel Diameter 150mm
Wheel Width 38mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm 40mm Offset Swivel Interference 230mm Overall Height 188mm **Swivel Radius** 115mm Hardness Of Tread 70±5° Shore D

Load Capacity (Dynamic) 180kgs

Temperature -25°C to +80°C
Fork Type Swivel Caster

270kgs

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.49kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

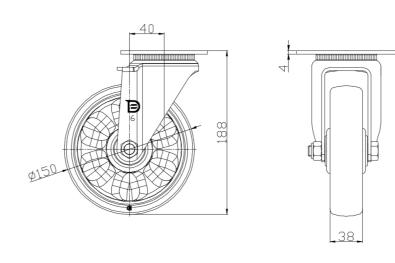

Mounting

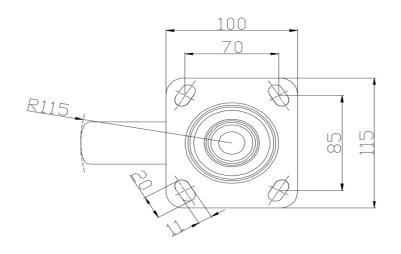

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.