1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (black, dark gray) Wheel Diameter × Wheel Width 150 x 38mm

EAN

YJ-11510600454073


Total Brake locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing.

Electroplated finish, Top Plate (4T) Mounting Type.
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray finish, Bearing with Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Fork Type

● Metric ○ Imperial

150mm Wheel Diameter Wheel Width 38mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 48mm Swivel Interference 326mm Overall Height 188mm Swivel Radius 163mm

Hardness Of Tread 72±5° Shore A

180kgs Load Capacity (Dynamic) Load Capacity (Static) 270kgs

-20°C to +60°C Temperature

Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.79kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

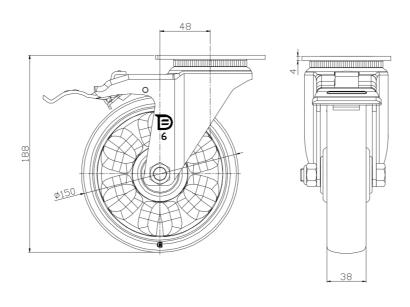

Mounting

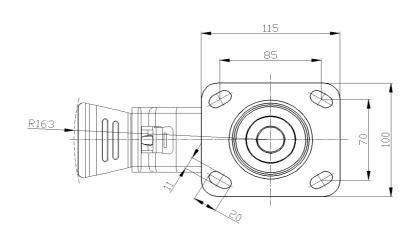

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.