# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

EPU (red round) Wheel Diameter × wWheel Width 150 x 42mm

EAN

YJ-11510600521013

Rigid Caster with integral Stamping Fork and D-shaped hole. Zine-Plated, Top Plate (3.5T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Red Cast Iron finish, Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Imperial ○ Metric

6" Wheel Diameter

1-11/16 " Wheel Width

Wheel Bearing Wheels With Ball Bearings 4-11/16 " x 3-13/16 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole 7-1/2 " Overall Height

Hardness Of Tread 94±5° Shore A Load Capacity (Dynamic) 772lbs Load Capacity (Static) 1157lbs

Temperature -4°F to +176°F Rigid Caster N/A N/A N/A

Fork Type Stainless **Electrical Conductivity** Anti-Static Weight 5.2lbs Standard ISO22883


### Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

#### **Dimensions**

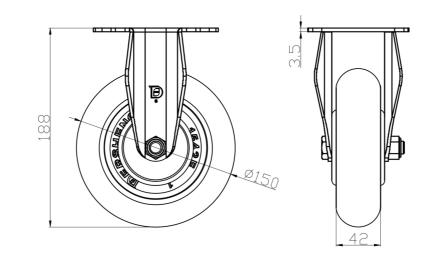

## Mounting

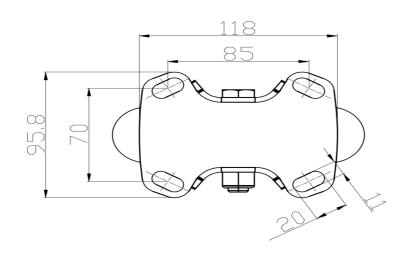

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.