# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

QPU (Blue flat) Wheel Diameter × Wheel Width 150 x 42mm

EAN


YJ-11510600534013

Casters with Total Brakes and Locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4T) Mounting Type. Cast Iron Wheel Center with High Quality Polyurethane tread. Blue color. Bearing: Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole 1-15/16 " Offset 13 " **Swivel Interference** Overall Height 7-1/2 " 6-1/2 " **Swivel Radius** Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.2lbs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### Dimensions

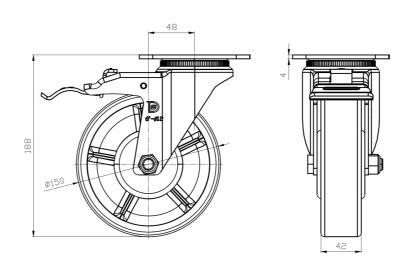

## Mounting

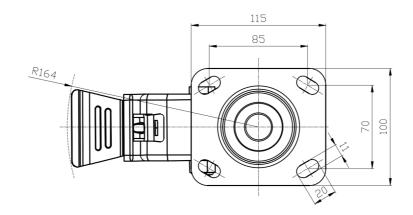

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.