

1151D Heavy Duty 1.5" Wide General Purposes Caster Series



Firecat (milling red) Wheel Diameter x Wheel Width 150 x 40mm


EAN

YJ-11510600812013

Swivel Caster, Top Plate with Riveted Stamping bracket and D-shaped hole. Zine-Plated, Top Plate (4T) Mounting Type mechanism. Cast Iron Wheel Center with High-Quality Resilient Rubber tread. Red Cast Iron finish, Bearing with Ball Bearing.

Wheel Tread: high-quality elastic rubber
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

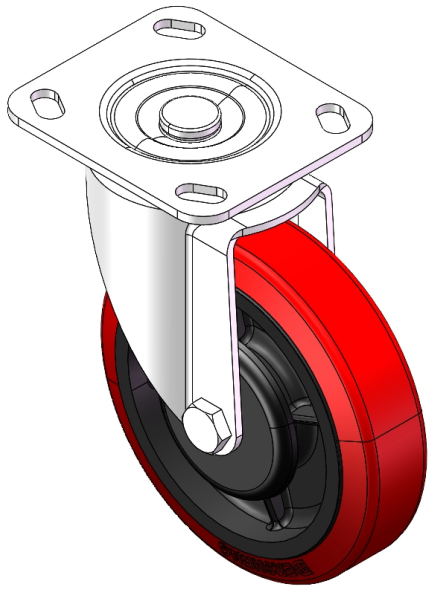

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	40mm
Swivel Interference	231mm
Overall Height	188mm
Swivel Radius	115.5mm
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	150kgs
Load Capacity (Static)	225kgs
Temperature	-25°C to +150°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.60kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

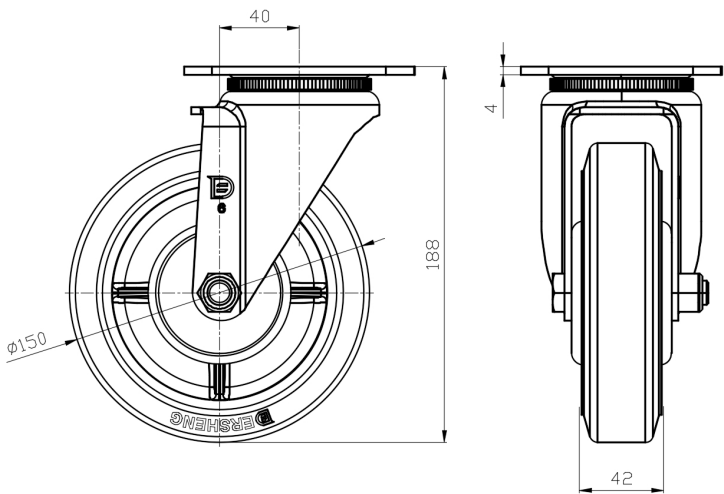

Mounting

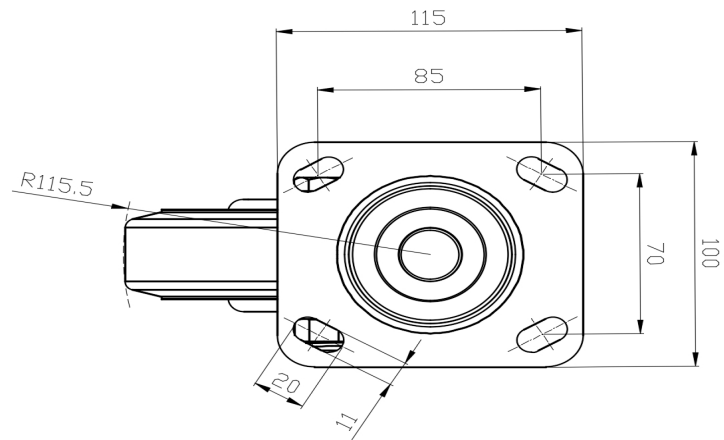

* For any deviation between metric and imperial spec, please refer to the metric spec.