

1151D Heavy Duty 1.5" Wide General Purposes Caster Series



Firecat (milling red) Wheel Diameter x Wheel Width 150 x 40mm


EAN

YJ-11510600812013

Swivel Caster, Top Plate with Riveted Stamping bracket and D-shaped hole. Zine-Plated, Top Plate (4T) Mounting Type mechanism. Cast Iron Wheel Center with High-Quality Resilient Rubber tread. Red Cast Iron finish, Bearing with Ball Bearing.

Wheel Tread: high-quality elastic rubber
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

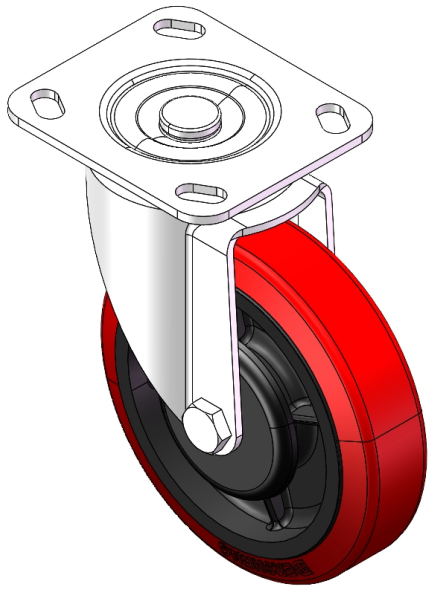

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	6 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	1-5/8 "
Swivel Interference	9-3/16 "
Overall Height	7-1/2 "
Swivel Radius	4-9/16 "
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	331lbs
Load Capacity (Static)	496lbs
Temperature	-13°F to +302°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	5.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

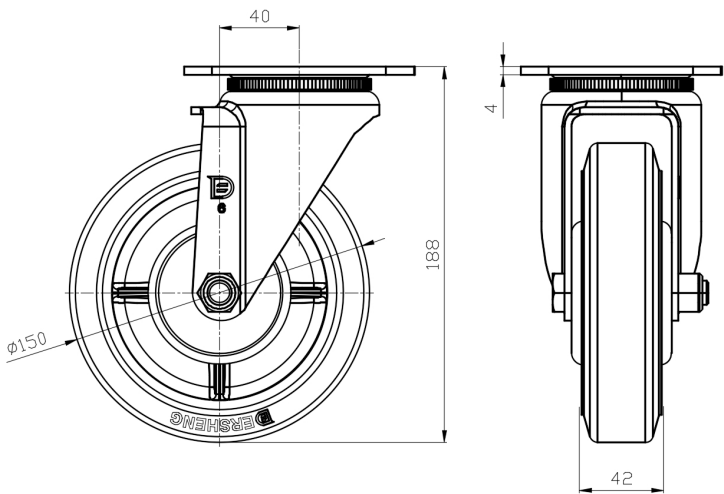

Mounting

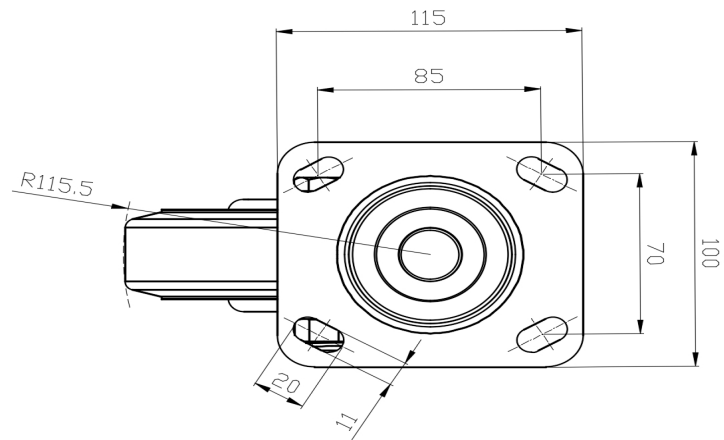

* For any deviation between metric and imperial spec, please refer to the metric spec.