

## 1154-R Light Duty Wire &amp; Shelving/Display (Round Raceway) Series




Rubber wheel wheel diameter x wheel width 75 x 25mm

A

YJ-11540300065043

Portable Casters, Threaded Stem Stamping Fork—M12-P1.75  
 Zinc-Plated surface, Mounting Type - Threaded Stem device  
 Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread  
 Wheels—Plain Bearing

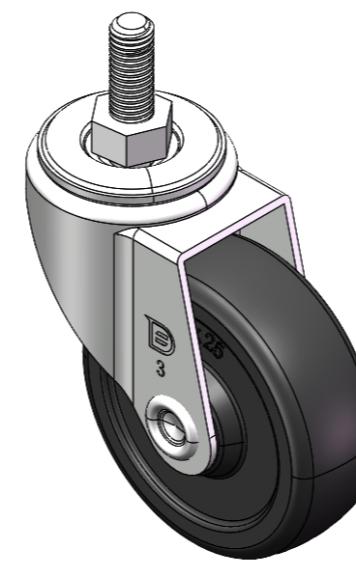

Wheel surface: High-quality elastic rubber  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	3 "
Wheel Width	5-1/25 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M12-P1.75
Threaded Length	1 "
Offset	1-1/4 "
Swivel Interference	5-7/16 "
Overall Height	4 "
Swivel Radius	2-11/16 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	110lbs
Load Capacity (Static)	165lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.9lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

## Dimensions

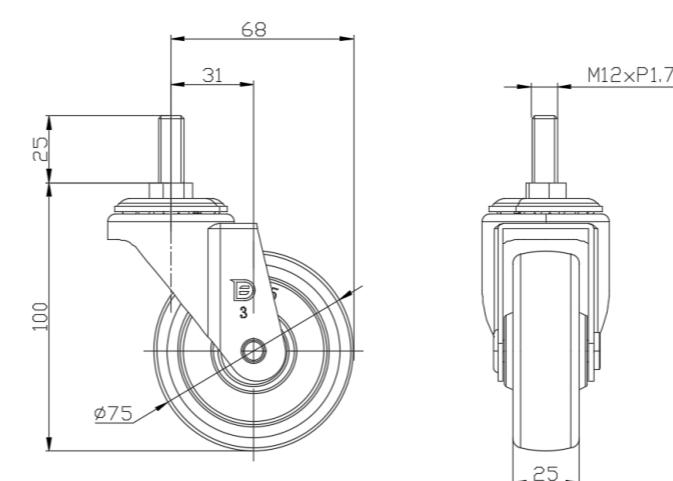

## Mounting

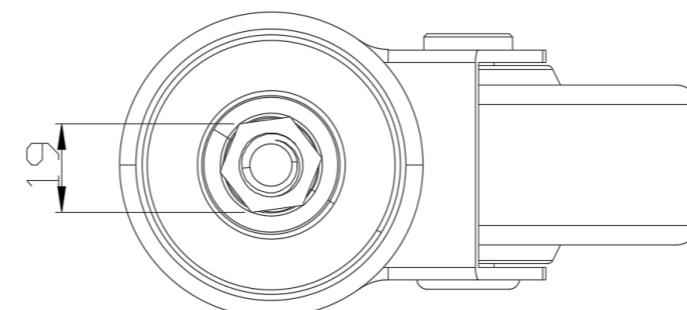

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com