


## 1154-R Light Duty Wire &amp; Shelving/Display (Round Raceway) Series

Rubber wheel wheel diameter x wheel width 75 x 25mm

A

YJ-11540300066033

Equipped with side (wheel) brakes and a With locking system. Stamping, Threaded Stem feet—M10-P1.5 Zinc-Plated surface, Mounting Type - Threaded Stem. Reinforced Polypropylene, High-Quality Resilient Rubber rim. Wheels—Plain Bearing.

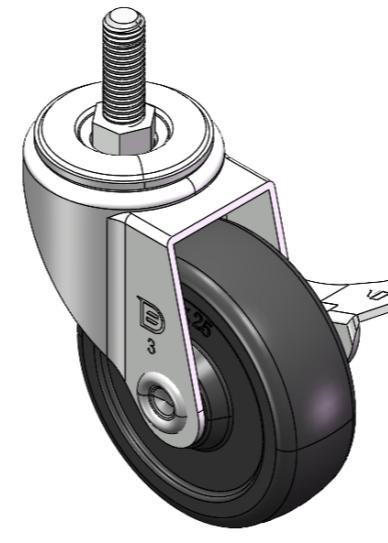

Wheel surface: High-quality elastic rubber  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	75mm
Wheel Width	25mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M10-P1.5
Threaded Length	29mm
Offset	31mm
Swivel Interference	136mm
Overall Height	100mm
Swivel Radius	68mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	50kgs
Load Capacity (Static)	75kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.40kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

## Dimensions

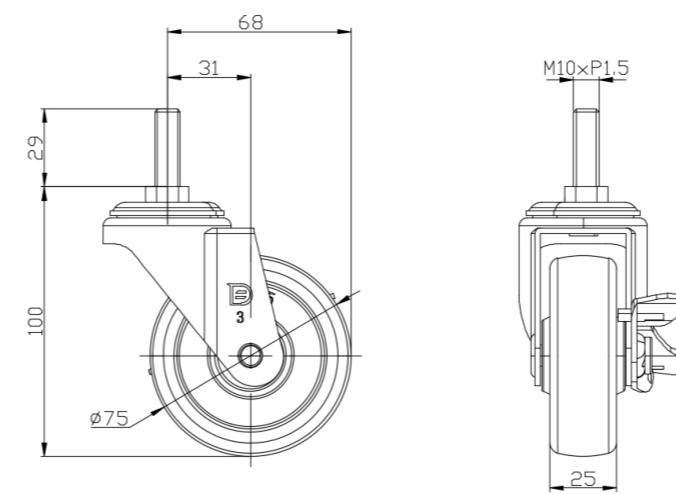

## Mounting

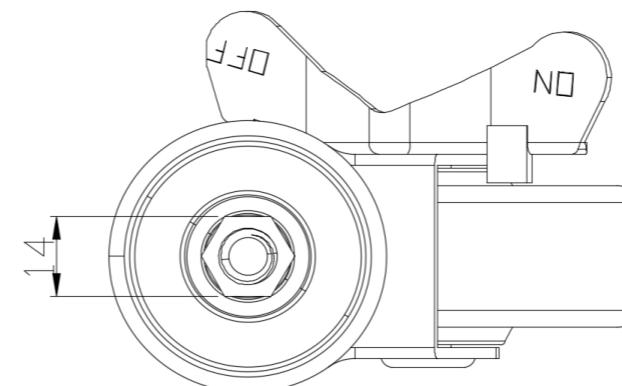

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com