

1154-R Light Duty Wire & Shelving/Display (Round Raceway) Series



Rubber wheel wheel diameter × wheel width 75 x 25mm


A

YJ-11540300066043

Equipped with side (wheel) brakes and a With locking system. Stamping, Threaded Stem feet—M12-P1.75
Zine-Plated surface, Mounting Type - Threaded Stem.
Reinforced Polypropylene, High-Quality Resilient Rubber rim.
Wheels—Plain Bearing.

Wheel surface: High-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

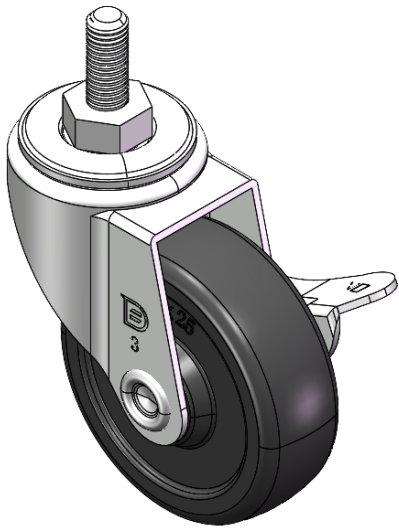

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	25mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M12-P1.75
Threaded Length	25mm
Offset	31mm
Swivel Interference	136mm
Overall Height	100mm
Swivel Radius	68mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	50kgs
Load Capacity (Static)	75kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.41kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

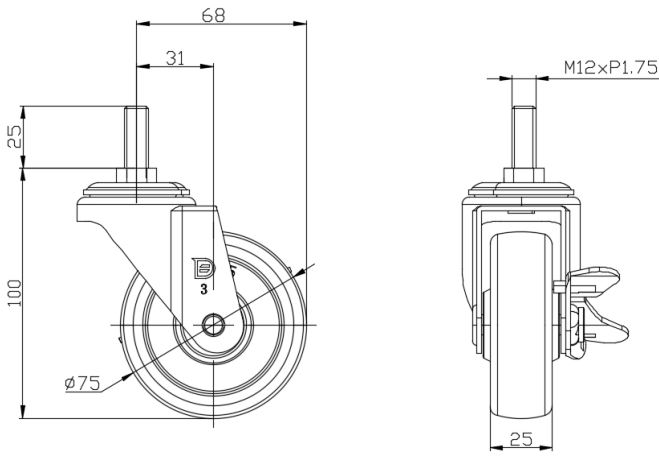

Mounting

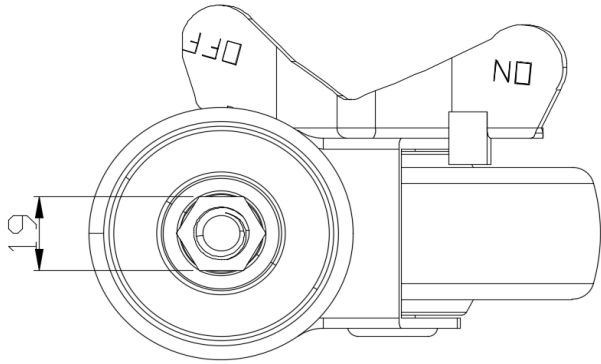

* For any deviation between metric and imperial spec, please refer to the metric spec.