

## 1154-R Light Duty Wire &amp; Shelving/Display (Round Raceway) Series




Rubber wheel wheel diameter x wheel width 75 x 25mm

A

YJ-11540300066043

Equipped with side (wheel) brakes and a With locking system. Stamping, Threaded Stem feet—M12-P1.75  
Zinc-Plated surface, Mounting Type - Threaded Stem.  
Reinforced Polypropylene, High-Quality Resilient Rubber rim.  
Wheels—Plain Bearing.

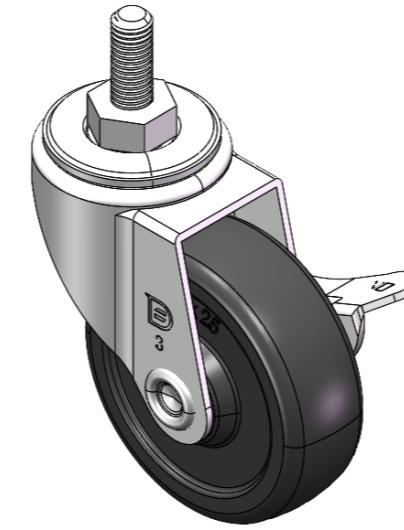

Wheel surface: High-quality elastic rubber  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter 3 "

Wheel Width 5-1/25 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12-P1.75

Threaded Length 1 "

Offset 1-1/4 "

Swivel Interference 5-7/16 "

Overall Height 4 "

Swivel Radius 2-11/16 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 110lbs

Load Capacity (Static) 165lbs

Temperature -4°F to +248°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.9lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

## Dimensions

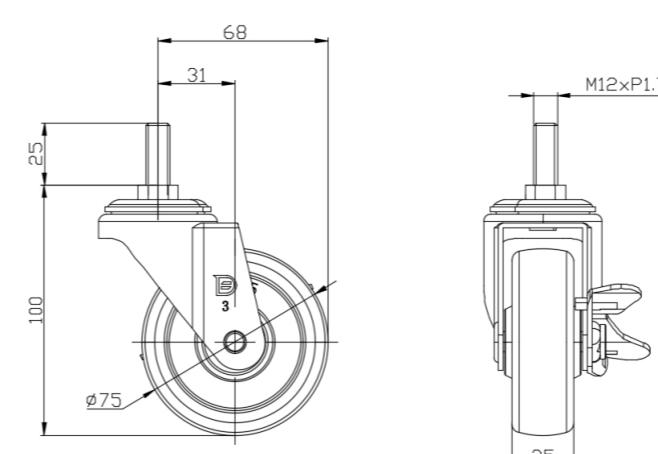

## Mounting

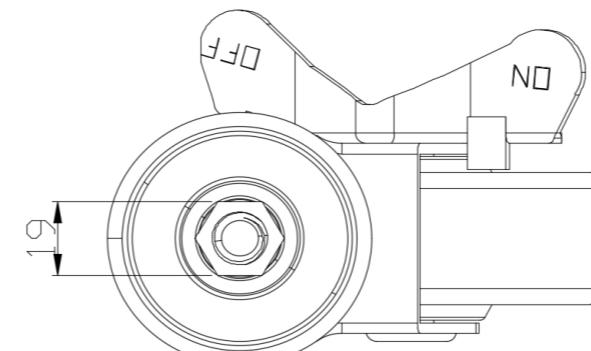

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com