

1154-R Circular Wave Plate Series

PPR wheel(Grey plane) wheel diameter × wheel width 125 x 26mm


EAN

YJ-11540500267023

Swivel caster, riveted stamped foot frame - Ø11x35L
Galvanized surface, plug-in installation device
Impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR) wheel surface
Gray, wheel - center tube type.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

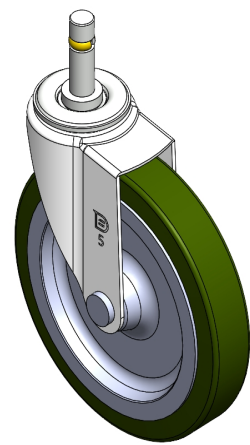

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	26mm
Wheel Bearing	wheels with a central tube
pole diameter	11mm
pole length	35mm
Offset	31mm
Swivel Interference	188mm
Overall height	145mm
Swivel Radius	94mm
Hardness of tread	82±5° Shore A
Load capacity (dynamic)	80kgs
Load capacity (static)	120kgs
Temperature	-20°C to +60°C
Stand Style	activity
Stainless steel	N/A
Conductive	N/A
Anti	N/A
Weight	0.44kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

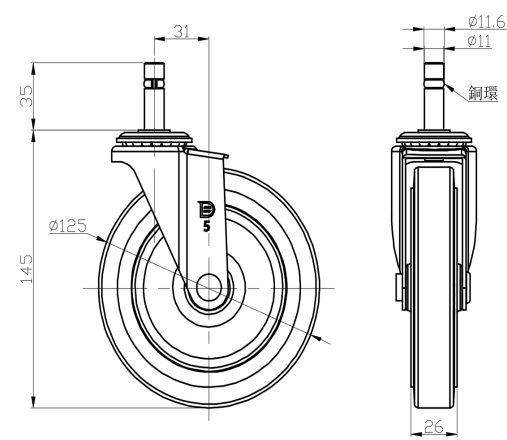

Mounting

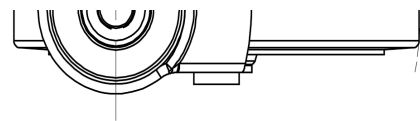

Drawings are for reference only and may differ from the product

* For any deviation between metric and imperial spec, please refer to the metric spec.