

1154-R Light Duty Wire & Shelving/Display (Round Raceway) Series

PPR (Grey plane) Wheel Diameter × Wheel Width 125 x 26mm

EAN


YJ-11540500267023

Swivel Caster, Riveted Stamping Fork - Ø11x35L Extended control lever surface, plug-in installation device High-quality Impact Resistance Polypropylene Wheel Center,High-Quality Thermoplastic Rubber (TPR) Wheel Tread Gray, wheel - Plain Bearing type.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

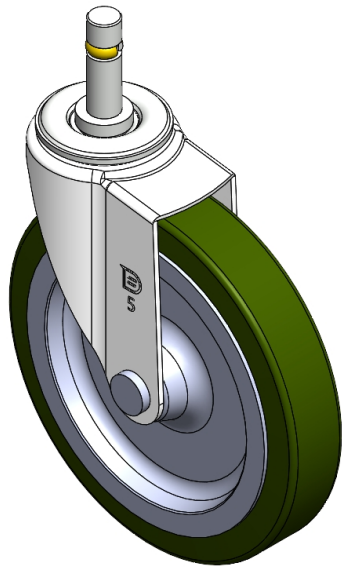

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	5 "
Wheel Width	1-1/16
Wheel Bearing	Wheel With Plain Bearing
Diameter	3/8 "
Stem Hole Spec	1-3/8 "
Offset	1-1/4 "
Swivel Interference	7-1/2 "
Overall Height	5-13/16 "
Swivel Radius	3-3/4 "
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	176lbs
Load Capacity (Static)	265lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.0lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

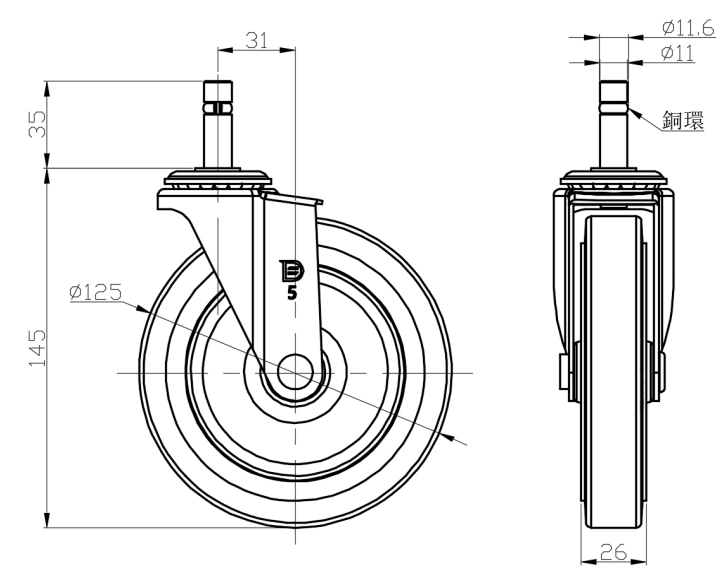

Mounting

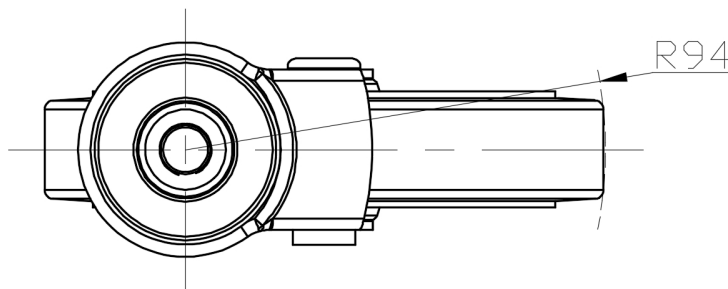

* For any deviation between metric and imperial spec, please refer to the metric spec.