



1168 Levelling Caster Series

QPU (brown round) Wheel Diameter × Wheel Width 62.5 x 45mm


EAN

YJ-11680250532023

Casters with a Total Brake Locking system. Top Plate with Riveted, Stamping Fork 44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacing, Short Pedal. Zine-Plated, Top Plate (4T) Mounting Type system with adjustable support. Cast Iron Wheel Center with High Quality Polyurethane tread. Brown color, Bearing with Ball Bearing.

Wheel Tread: high quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

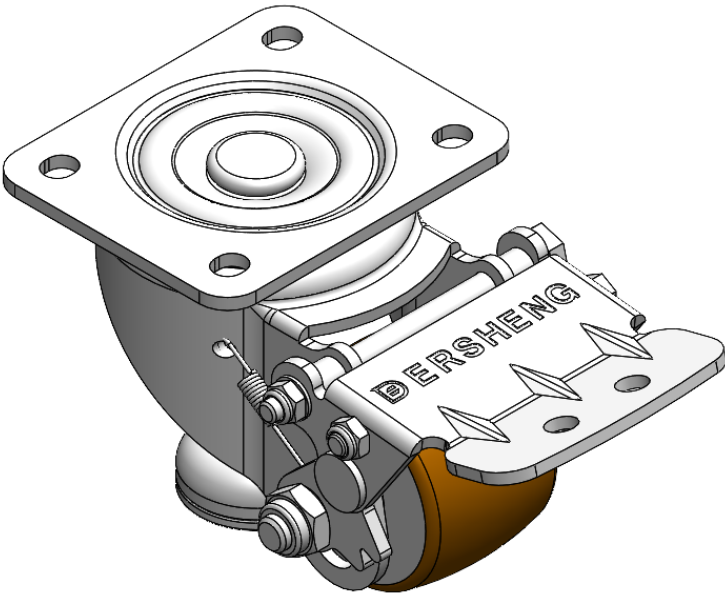

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	62.5mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	57mm
Swivel Interference	270mm
Overall Height	102mm
Swivel Radius	135mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	1000kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

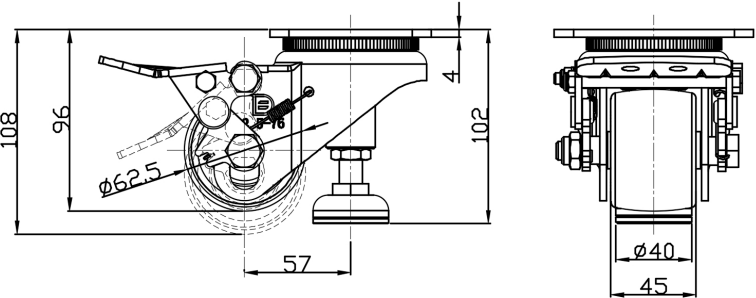

Mounting

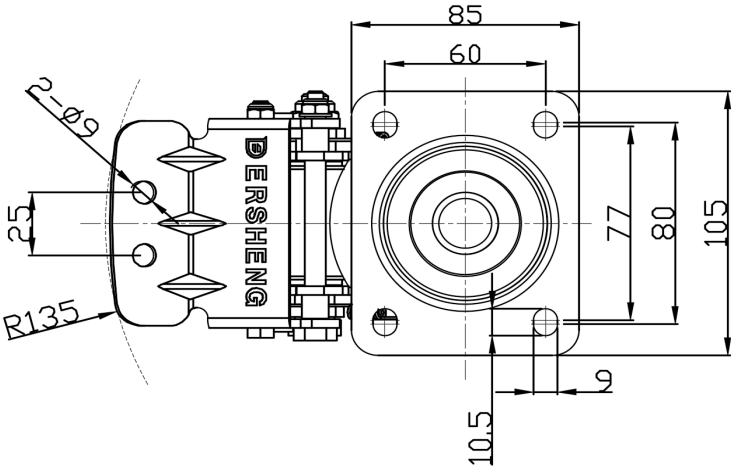

* For any deviation between metric and imperial spec, please refer to the metric spec.