1168 Levelling Caster Series

King Kong Wheel (black) Wheel Diameter × Wheel Width 62.5×45 mm


EAN

YJ-11680250712073

Swivel Caster with Riveted Fork and Stamping Fork—D-shaped hole. Zine-Plated, Forkmount (4T) Mounting Type mechanism with Height Adjustable Stand. Reinforced Polypropylene and tread. Black, Bearing—Ball Bearing.

Wheel Tread: Thermoplastic (POK)
Wheel Center: Thermoplastic (POK)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 2-9/16
Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 2-9/16 " 7-11/16 " Swivel Interference 4-1/16" Overall Height 3-7/8 " **Swivel Radius** Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 2205lbs

Temperature -4°F to +176°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.2lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

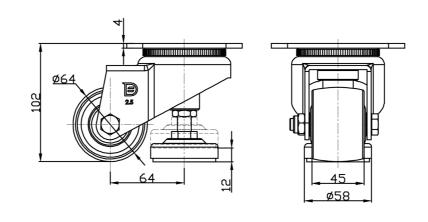

Mounting

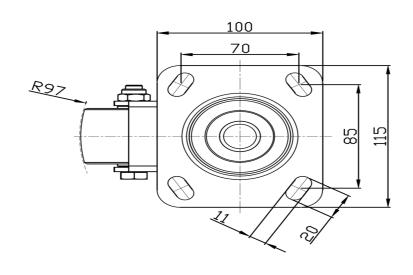

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.