



1168 Levelling Caster Series

ZQPU (Milled Blue) Wheel Diameter × Wheel Width 62.5× 20 (41.5) mm


EAN

YJ-11680250802013

Height Adjustable Leveling Caster. Top Plate with Riveted, Stamping Fork 44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacing, Long Pedal. Zine-Plated, Top Plate (4T) Mounting Type mechanism with Height Adjustable Stand. Cast Iron Wheel Center with High Quality Polyurethane tread. Blue color, Bearing with Ball Bearing.

Wheel Tread: high quality polyurethane  
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

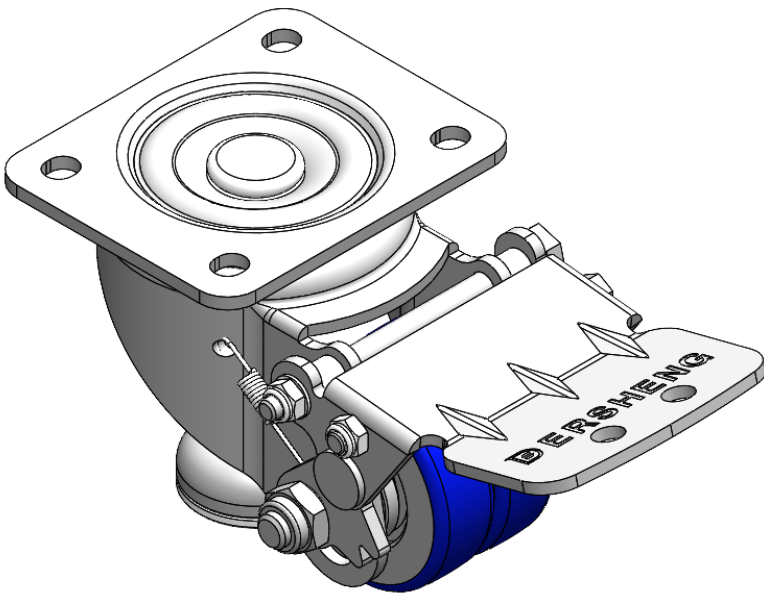

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 2-1/2 "                   |
| Wheel Width                                                            | 1-11/16                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 4-3/16 " x 3-7/16 "       |
| Bolt Hole Spacing                                                      | 3-3/16 " x 2-7/16 "       |
| Plate Hole                                                             | 3/8 " x 23/64 "           |
| Offset                                                                 | 2-1/4 "                   |
| Swivel Interference                                                    | 12 "                      |
| Overall Height                                                         | 4-1/16 "                  |
| Swivel Radius                                                          | 6 "                       |
| Hardness Of Tread                                                      | 87±5° Shore A             |
| Load Capacity (Dynamic)                                                | 441lbs                    |
| Load Capacity (Static)                                                 | 2205lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 4.7lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

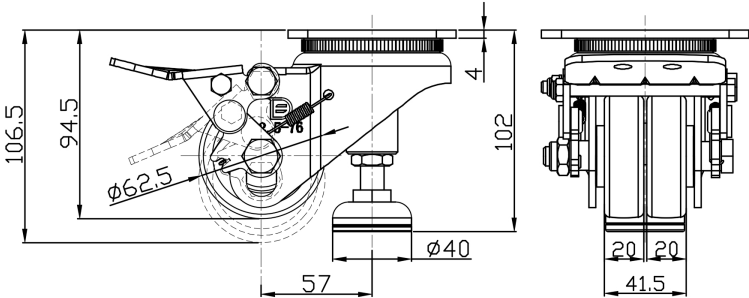

Mounting

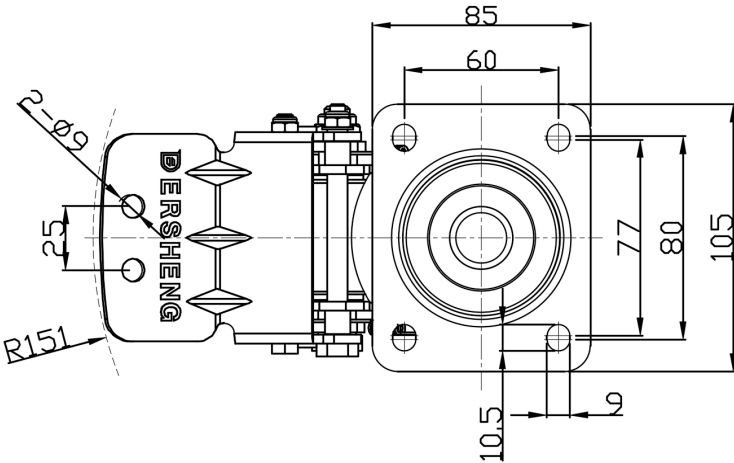

\* For any deviation between metric and imperial spec, please refer to the metric spec.