# 1168 Levelling Caster Series

# Dersheng Casters Keep Rolling

MRC (black) Wheel Diameter × Wheel Width 75 x 45 mm


EAN

YJ-11680300052033

Adjustable lift Caster with Riveted, Stamping Fork 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing and Long Pedal. Zine-Plated, Mounting Type - Top Plate, and adjustable support. Reinforced Polypropylene and tread. Black, Bearing with Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

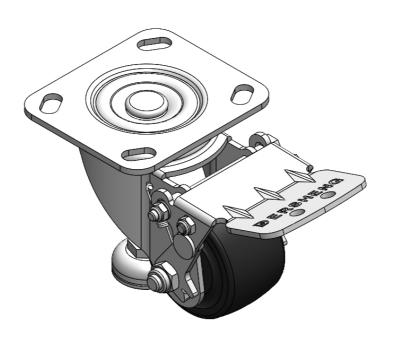

Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 2-1/4 "

Swivel Interference 12 "

Swivel Interference 12 "

Overall Height 4-13/16 "

Swivel Radius 6 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 573lbs

Load Capacity (Static) 2205lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.4lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

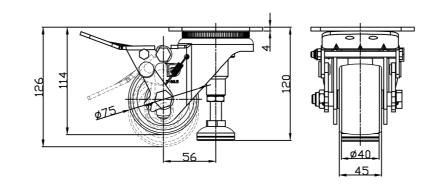

## Mounting

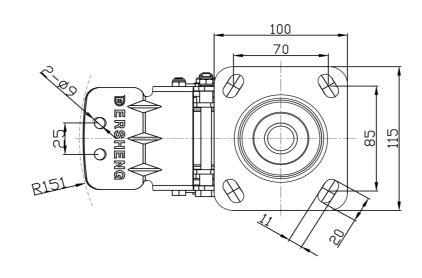

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.