# 1168 Levelling Caster Series

MRC (black) Wheel Diameter × Wheel Width 75 x 45 mm


EAN

YJ-11680300052073

Swivel Caster with Riveted Fork and Stamping bracket—European standard holes. Zine-Plated, Mounting Type - Top Plate, Height Adjustable Stand. Reinforced Polypropylene and tread. Black, Bearing—Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/16 " x 3-7/16 "

Bolt Hole Spacing 3-3/16 " x 2-7/16 "

Plate Hole 3/8 " x 23/64 "

Offset 2-3/4 "

Swivel Interference 8-1/2 "

Overall Height 4-13/16 "

Swivel Radius 4-1/4 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 2205lbs

Temperature -4°F to +176°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.2lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**



## Mounting

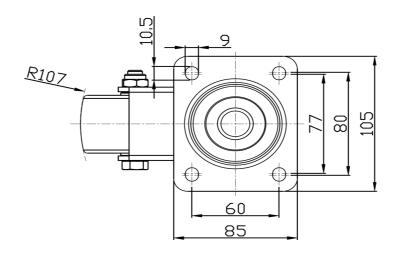

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.