## 1168 Levelling Caster Series

# Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 75 × 45mm

EAN


YJ-11680300532063

Swivel Caster with Riveted Fork and Stamping Fork with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Cast Iron Wheel Center with High Quality Polyurethane tread. Brown color, Bearing with Ball Bearing.

Wheel Tread: high quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "

Swivel Interference 6-3/16 "

Swivel Interference 6-3/16 "

Overall Height 4-13/16 "

Swivel Radius 3-1/8 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.1lbs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### Dimensions

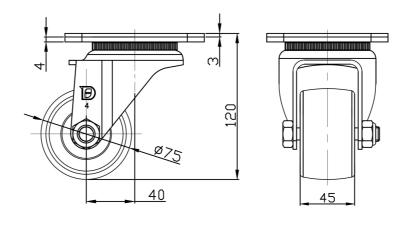

### Mounting

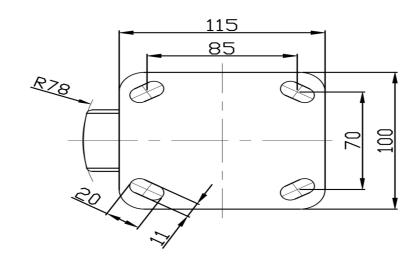

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.