1168 Levelling Caster Series

ZQPU (milling blue) Wheel Diameter × Wheel Width 75×20 (41.5) mm

EAN


YJ-11680300801023

Rigid Caster with integral Stamping Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Cast Iron Wheel Center with High Quality Polyurethane tread. Blue color. Bearing: Ball Bearing.

Wheel Tread: high quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

3 " Wheel Diameter

1-11/16 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole 4-13/16 " Overall Height

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 661lbs Load Capacity (Static) 992lbs Temperature -4°F to +158°F Fork Type Rigid Caster Stainless N/A

Electrical Conductivity N/A N/A Anti-Static Weight 3.3lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

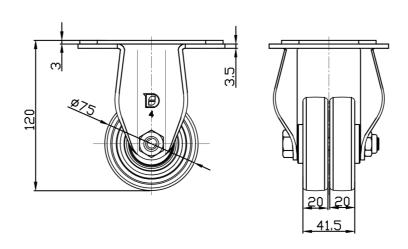

Mounting

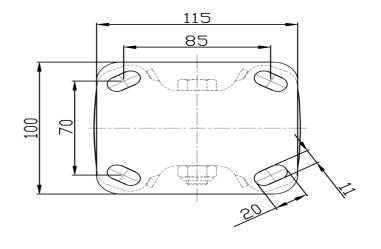

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.