1168 Levelling Caster Series

Dersheng Casters Keep Rolling

ZQPU (milling blue) Wheel Diameter × Wheel Width 75×20 (41.5) mm


EAN

YJ-11680300802053

Swivel Caster with Riveted Fork and Stamping bracket - European standard holes Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane tread Blue color, Bearing - Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/16 " x 3-7/16 "

Bolt Hole Spacing 3-3/16 " x 2-7/16 "

Plate Hole 3/8 " x 23/64 "

Offset 1-5/8 "

Swivel Interference 6-3/16 "

Overall Height 4-13/16 "

Swivel Radius 3-1/8 "

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.8lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

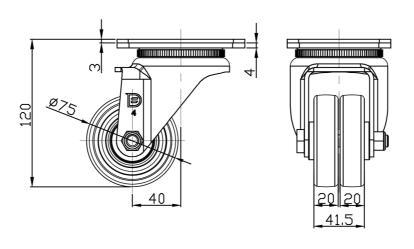

Mounting

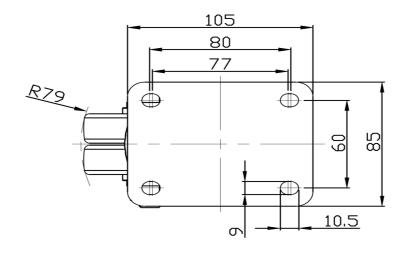

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.