# 1168 Levelling Caster Series

# ZQPU (milling blue) Wheel Diameter × Wheel Width 75×20 (41.5) mm

EAN


#### YJ-11680300802063

Swivel Caster with Riveted Fork and Stamping Fork with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Cast Iron Wheel Center with High Quality Polyurethane tread. Blue color. Bearing: Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center: cast iron core

Tribon Comen add non conc

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### **Technical Data**

#### ● Imperial ○ Metric

Wheel Diameter

Wheel Width 1-11/16"

Wheel Bearing Wheels With Ball Bearings

3 "

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "

Swivel Interference 6-3/16 "

Swivel Interference 6-3/16 "

Overall Height 4-13/16 "

Swivel Radius 3-1/8 "

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.1lbs

Standard ISO22883


### Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

#### **Dimensions**

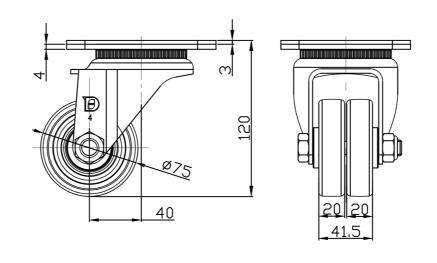

## Mounting

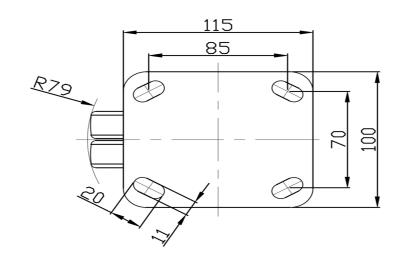

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.