


1168 Levelling Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 100 x 32mm

EAN

YJ-11680400071013

Rigid castor, Stamping Fabricated Caster Fork - European standard holes Extended control lever surface, Mounting Type - Top Plate Reinforced Polypropylene and Wheel Tread Natural color, Bearing - Ball Bearing.

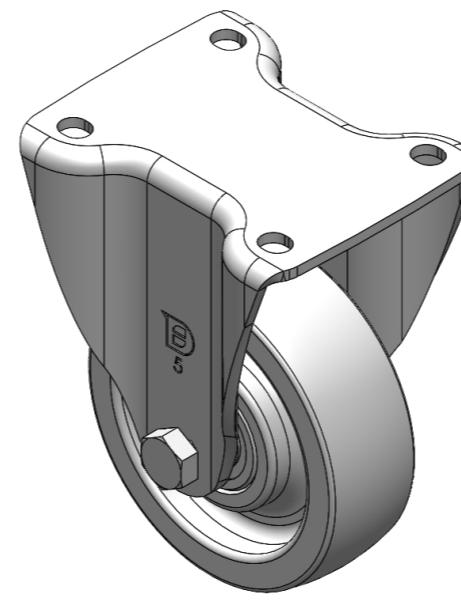

Picture may differ from original product

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Technical Data


Metric Imperial

Wheel Diameter	100mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 88mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Overall Height	142.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	320kgs
Load Capacity (Static)	480kgs
Temperature	-20°C to +80°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.87kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • ○ ○ ○
Floor Surface Preservation	• • ○ ○ ○

Dimensions

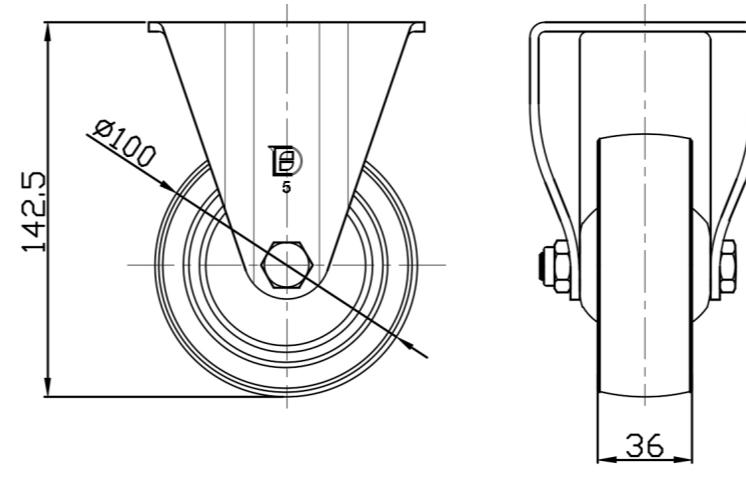

Mounting

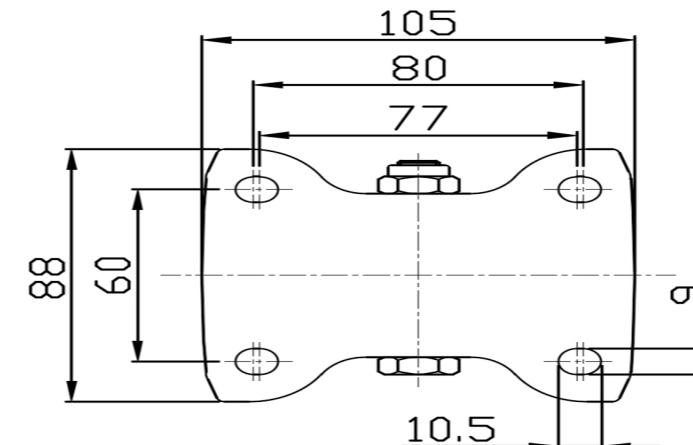

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com