

1168 Levelling Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 100 x 32mm


EAN

YJ-11680400072023

Height Adjustable Leveling Caster, Top Plate with Riveted, Fork 44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacing, Short Pedal Zinc-Plated, Mounting Type - Top Plate, Height Adjustable Stand Reinforced Polypropylene and tread Transparent, Bearing with Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

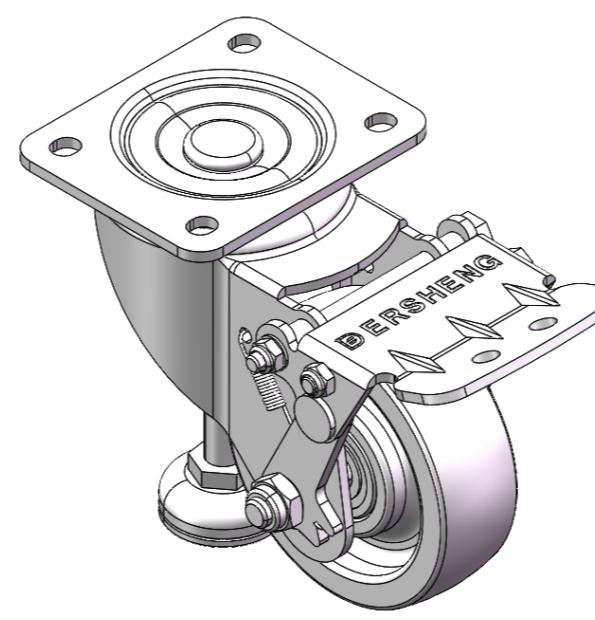

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	100mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	65mm
Swivel Interference	270mm
Overall Height	142.5mm
Swivel Radius	135mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	320kgs
Load Capacity (Static)	1000kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.03kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

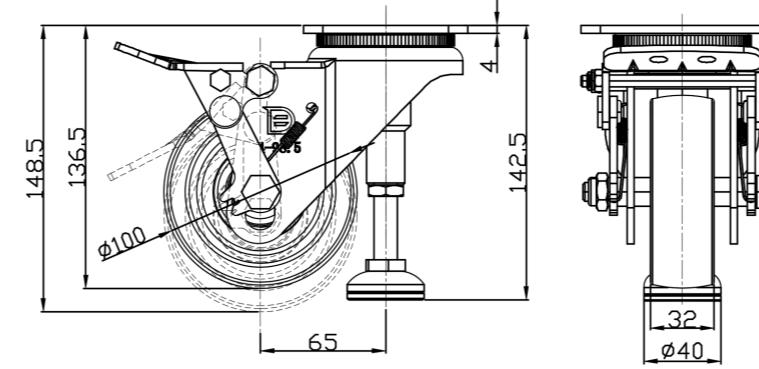

Mounting

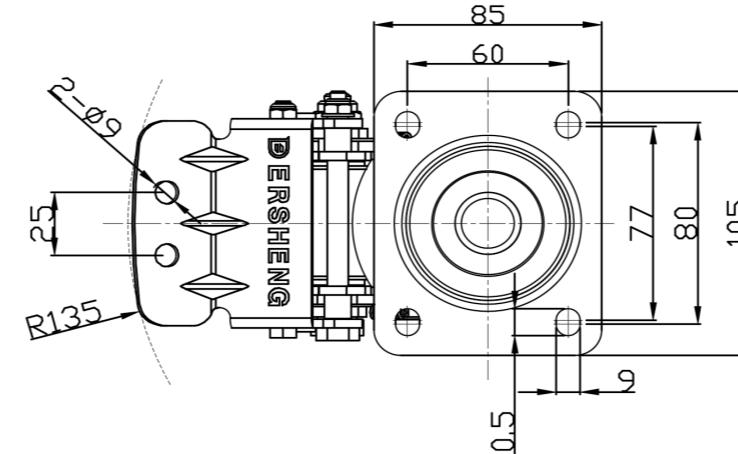

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com