



1168 Levelling Caster Series

MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm


EAN

YJ-11680400072043

Height Adjustable Leveling Caster, Top Plate with Riveted Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacings, Short Pedal Zine-Plated, Mounting Type - Top Plate, Height Adjustable Stand Reinforced Polypropylene and tread Transparent, Bearing with Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

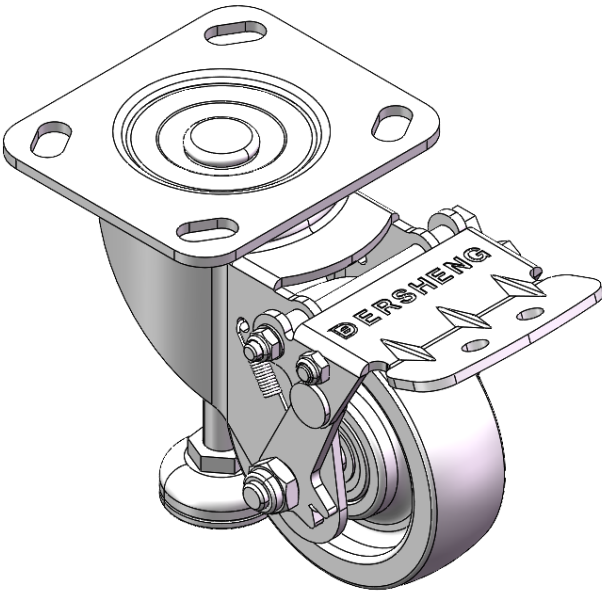

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	65mm
Swivel Interference	270mm
Overall Height	142.5mm
Swivel Radius	135mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	320kgs
Load Capacity (Static)	1000kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.1kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

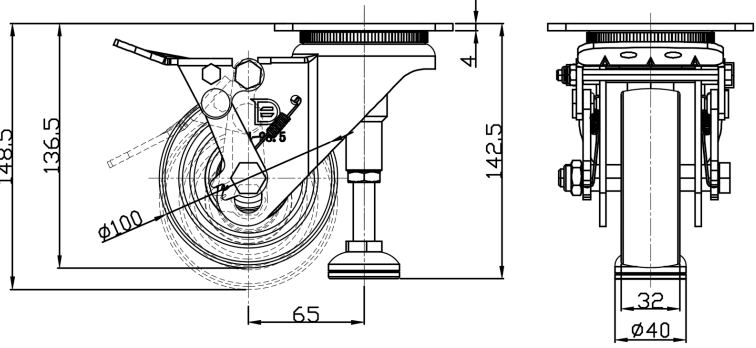

Mounting

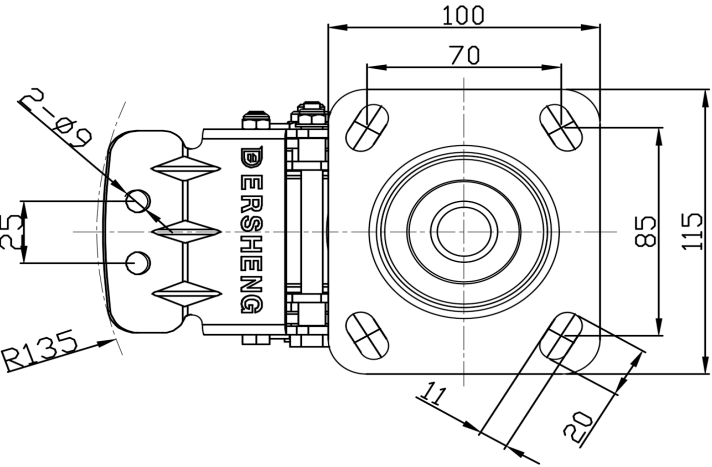

* For any deviation between metric and imperial spec, please refer to the metric spec.