


1168 Levelling Caster Series

MRC (Black) Wheel Diameter x Wheel Width 100x36mm

EAN

YJ-11680400072073

Adjustable lift Caster with Riveted, Stamping Fork 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing and Long Pedal. Zinc-Plated, Mounting Type - Top Plate, and adjustable support. Reinforced Polypropylene and tread. Black, Bearing with Ball Bearing.

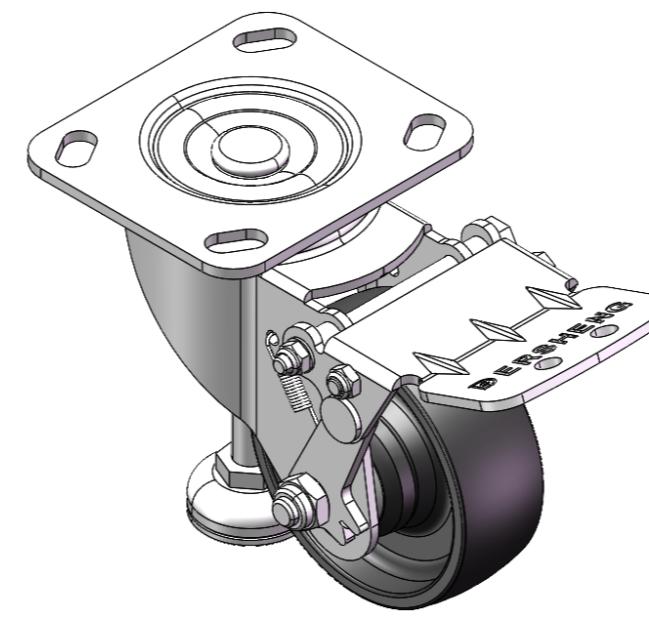

Picture may differ from original product

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Technical Data


Metric Imperial

Wheel Diameter	100mm
Wheel Width	36mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	65mm
Swivel Interference	302mm
Overall Height	142.5mm
Swivel Radius	151mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	250kgs
Load Capacity (Static)	1000kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.95kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

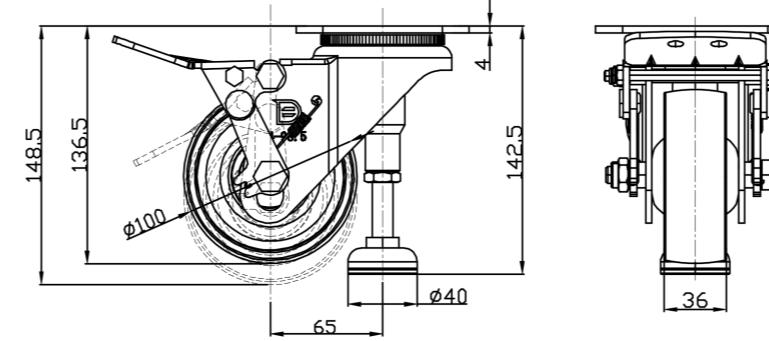

Mounting

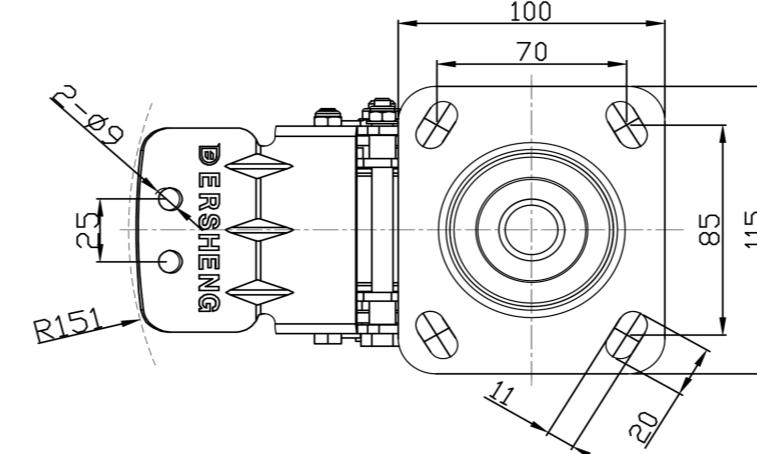

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com