


1168 Levelling Caster Series

MRC (Black) Wheel Diameter x Wheel Width 100x36mm

EAN

YJ-11680400072083

Adjustable lift Caster with Riveted, Stamping Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing, Short Pedal. Zinc-Plated, Mounting Type - Top Plate, Height Adjustable Stand. Reinforced Polypropylene and tread. Black, Bearing with Ball Bearing.

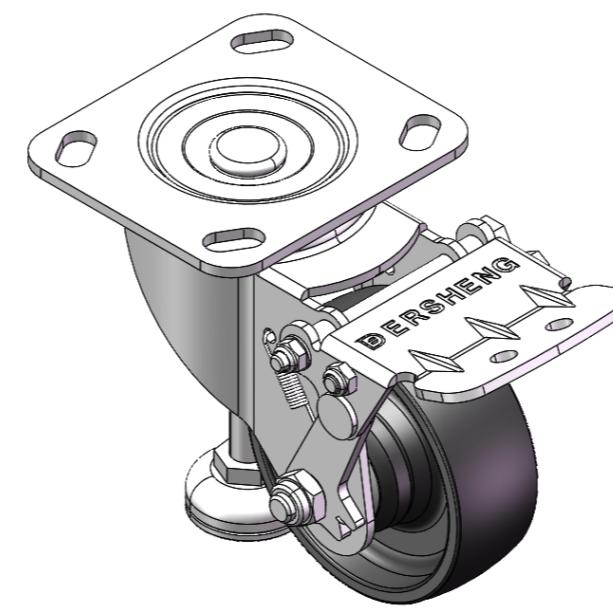

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 4 "

Wheel Width 1-7/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 2-9/16 "

Swivel Interference 10-11/16 "

Overall Height 5-11/16 "

Swivel Radius 5-7/16 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 2205lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.4lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

Dimensions

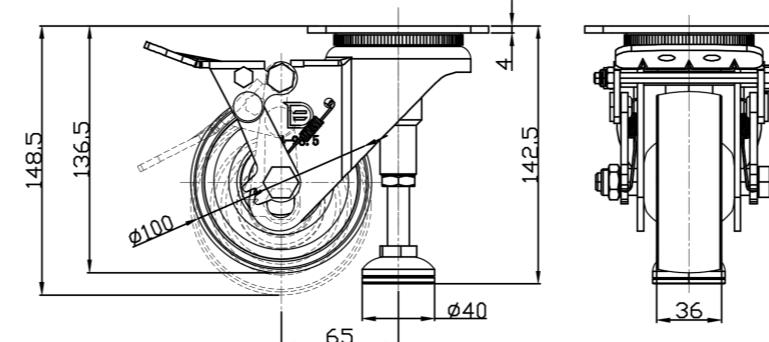

Mounting

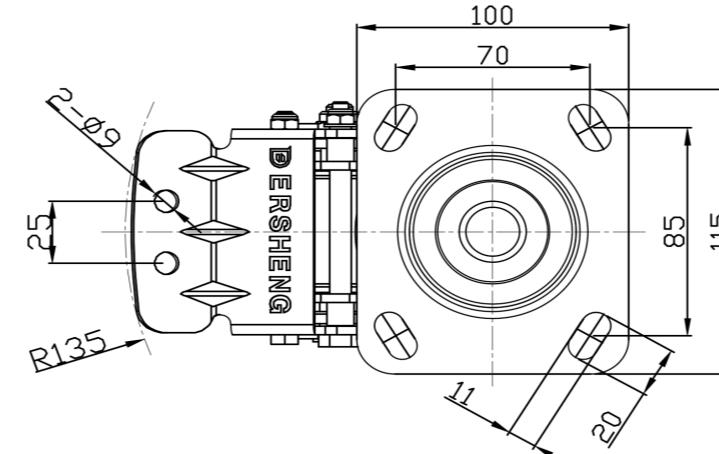

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com