


1168 Levelling Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 100 x 32mm

EAN

YJ-11680400072093

Swivel Caster with Riveted Fork and Stamping bracket—European standard holes Zinc-Plated, Mounting Type - Top Plate Reinforced Polypropylene and tread Natural color, Bearing—Ball Bearing.

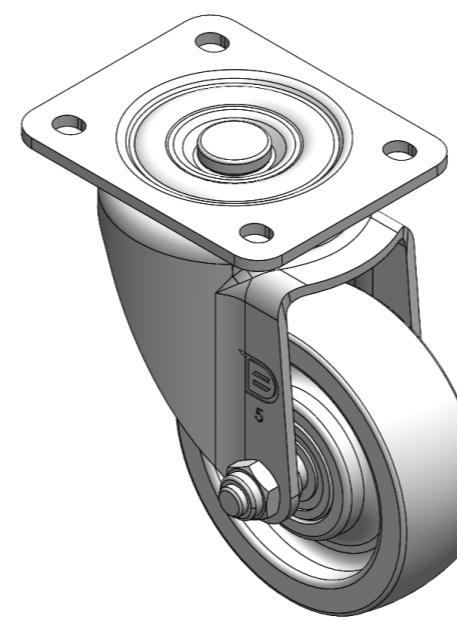

Picture may differ from original product

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Technical Data


Metric Imperial

Wheel Diameter	100mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	40mm
Swivel Interference	182mm
Overall Height	142.5mm
Swivel Radius	91mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	320kgs
Load Capacity (Static)	480kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.13kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

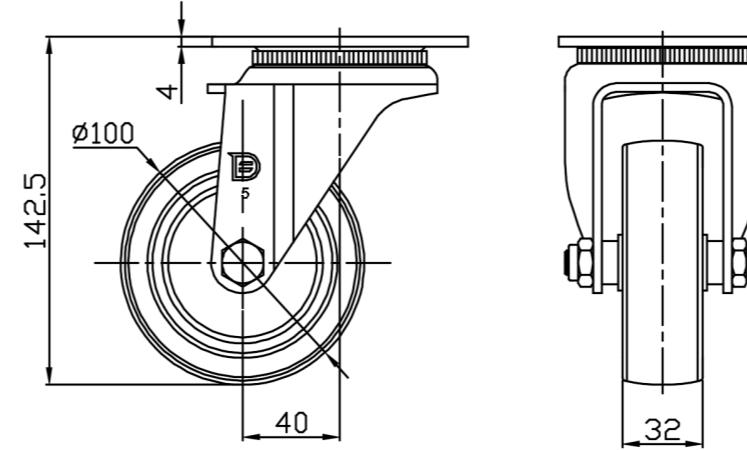

Mounting

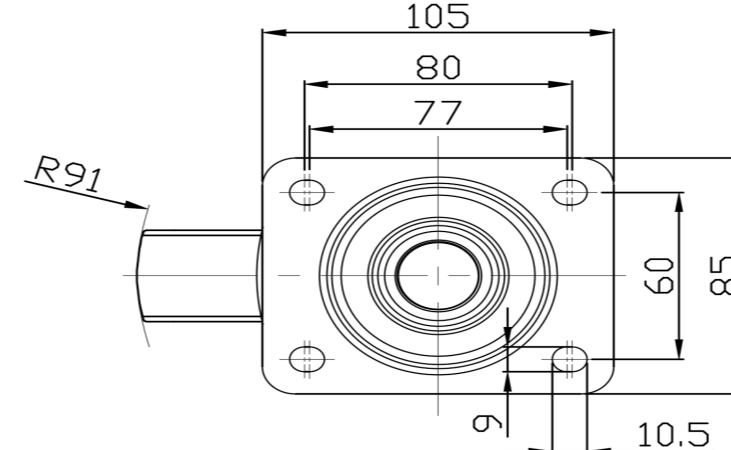

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com