


1168 Levelling Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 100 x 32mm

EAN

YJ-11680400072093

Swivel Caster with Riveted Fork and Stamping bracket—European standard holes Zinc-Plated, Mounting Type - Top Plate Reinforced Polypropylene and tread Natural color, Bearing—Ball Bearing.

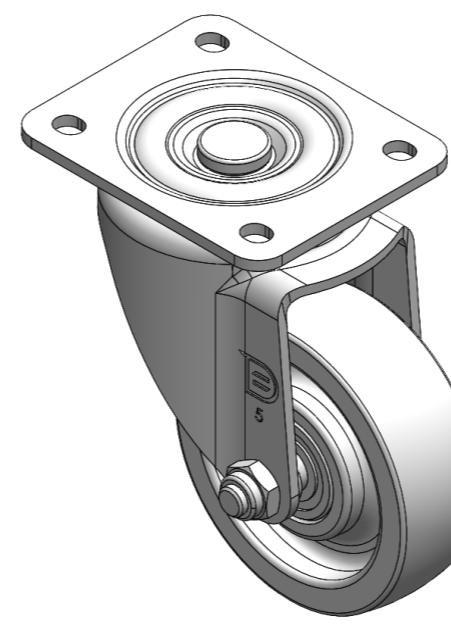

Picture may differ from original product

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Technical Data

Imperial Metric

Wheel Diameter

4 "

Wheel Width

1-5/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-3/16 " x 3-7/16 "

Bolt Hole Spacing

3-3/16 " x 2-7/16 "

Plate Hole

3/8 " x 23/64 "

Offset

1-5/8 "

Swivel Interference

7-1/4 "

Overall Height

5-11/16 "

Swivel Radius

3-5/8 "

Hardness Of Tread

75±5° Shore D

Load Capacity (Dynamic)

705lbs

Load Capacity (Static)

1058lbs

Temperature

-4°F to +176°F

Fork Type

Swivel Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

2.5lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

Dimensions

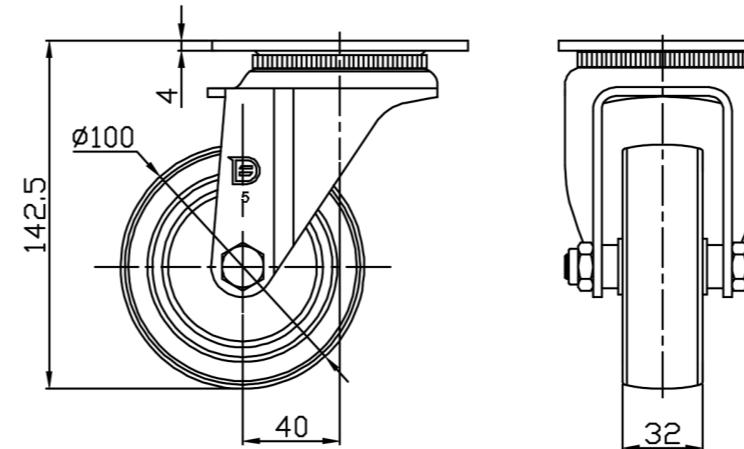

Mounting

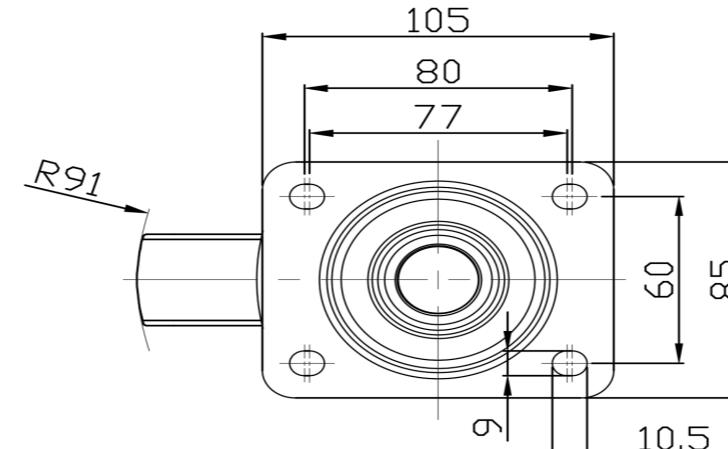

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com