# 1168 Levelling Caster Series

MRC (Black) Wheel Diameter × Wheel Width 100×36mm


EAN

YJ-11680400072143

Swivel Caster with Riveted Fork and Stamping bracket—European standard holes. Zine-Plated, Mounting Type - Top Plate, Height Adjustable Stand. Reinforced Polypropylene and tread. Black, Bearing—Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-7/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/16 " x 3-7/16 "

Bolt Hole Spacing 3-3/16 " x 2-7/16 "

Plate Hole 3/8 " x 23/64 "

Offset 3-1/16 "

Swivel Interference 10 "

Overall Height 5-11/16 "

Swivel Radius 5 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 2205lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.1lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance


Operating Noise

• • 0 0 0


Floor Surface Preservation  $\bullet \bullet \circ \circ \circ$ 

#### **Dimensions**





## Mounting

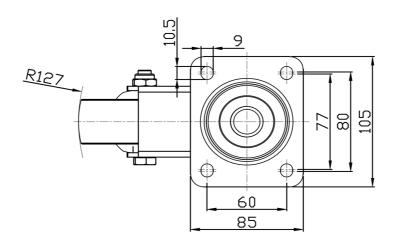

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.