# 1168 Levelling Caster Series

Dersheng Casters Keep Rolling

AQPU (brown round) Wheel Diameter × Wheel Width 100 x 40mm


EAN

YJ-11680400602073

Swivel Caster with Riveted, Stamping Fork and European standard holes. Zine-Plated, Mounting Type - Top Plate with Height Adjustable Stand. Aluminum Wheel Center with High Quality Polyurethane tread. Brown, Bearing with Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 105 x 85mm **Bolt Hole Spacing** 80 x 60mm Plate Hole 10.5 x 9mm 77mm Offset 254mm Swivel Interference Overall Height 142.5mm **Swivel Radius** 127mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 1000kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.91kgs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**

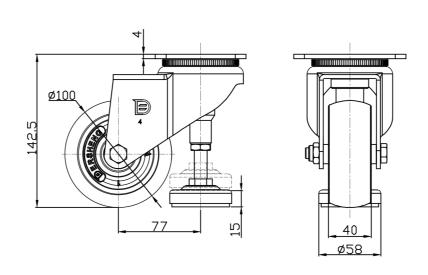

## Mounting

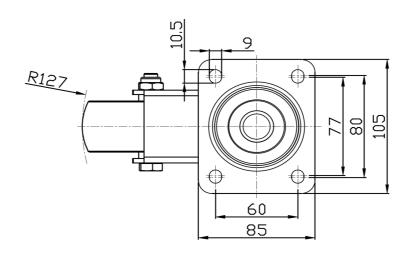

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.