


1168 Levelling Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 100 x 22 (46.5) mm

EAN

YJ-11680400802053

Swivel Caster with Riveted Fork and Stamping bracket - European standard holes Zinc-Plated, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane tread Brown, Bearing - Ball Bearing.

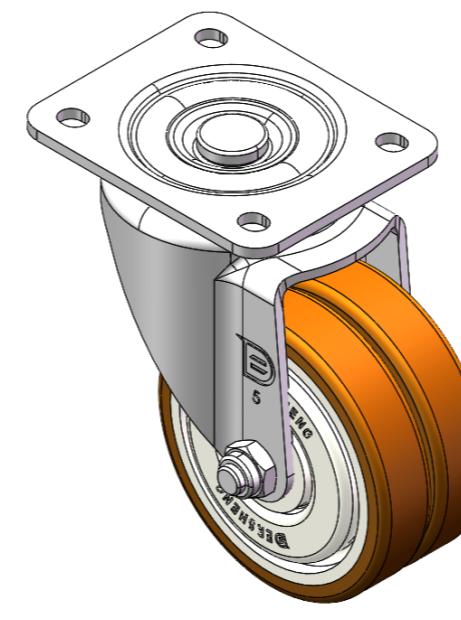

Wheel Tread: high quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 4 "

Wheel Width 1-7/8

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/16 " x 3-7/16 "

Bolt Hole Spacing 3-3/16 " x 2-7/16 "

Plate Hole 3/8 " x 23/64 "

Offset 1-5/8 "

Swivel Interference 7-3/8 "

Overall Height 5-11/16 "

Swivel Radius 3-11/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 705lbs

Load Capacity (Static) 1058lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.3lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

Dimensions

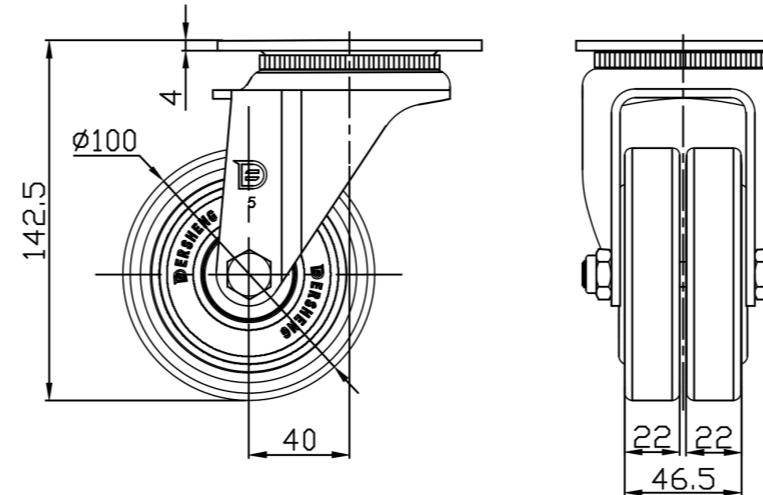

Mounting

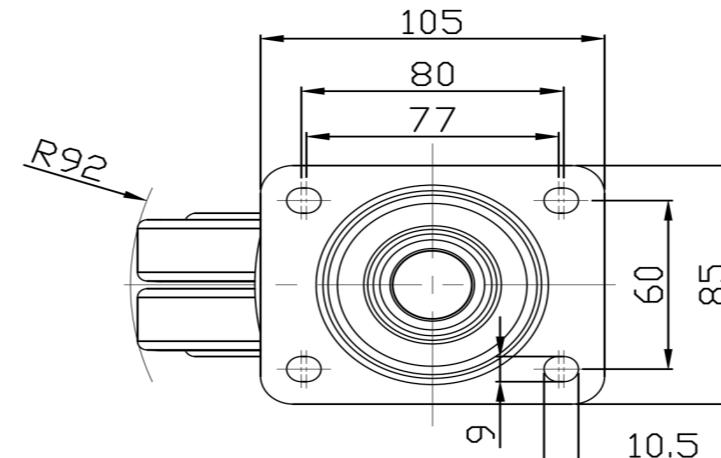

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com