1168 Levelling Caster Series

Dersheng Casters Keep Rolling

ZQPU (brown round) Wheel Diameter x Wheel Width 100 x 22 (46.5) mm


EAN

YJ-11680400802083

Swivel Caster with Riveted Fork and Stamping Fork with D-shaped hole. Zine-Plated, Fork-mounted Mounting Type with Height Adjustable Stand. Cast Iron Wheel Center with High Quality Polyurethane tread. Brown color, Bearing with Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Fork Type

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 46.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 77mm 254mm Swivel Interference **Overall Height** 142.5mm **Swivel Radius** 127mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 1000kgs

Temperature -20°C to +70°C

Swivel Caster

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight3.06kgsStandardISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

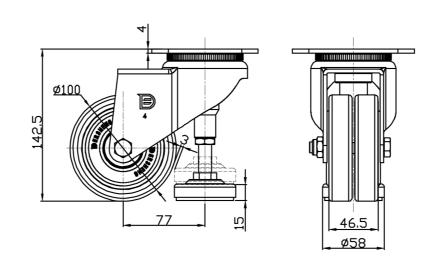

Mounting

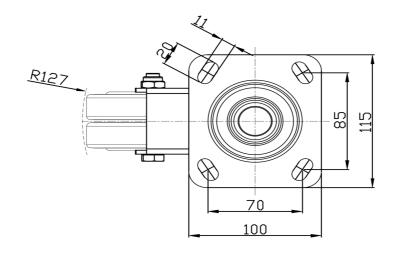

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.