


## 1139 Medium Duty General Purposes Caster Series

PPR (Dark grey) Wheel Diameter x Wheel Width 125 x 31mm

EAN

YJ-12022605133673

Swivel Caster, thread-Riveted Stamping Fork—M16-P2.0 Extended control lever surface, Mounting Type - Threaded Stem device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-luster dark gray, Bearing—Ball Bearing.

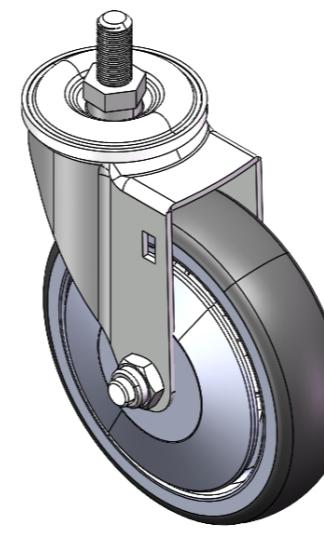

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2.0

Threaded Size 1 "

Offset 1-1/2 "

Swivel Interference 8 "

Overall Height 6-5/16 "

Swivel Radius 4 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 243lbs

Load Capacity (Static) 364lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.7lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • •

## Dimensions

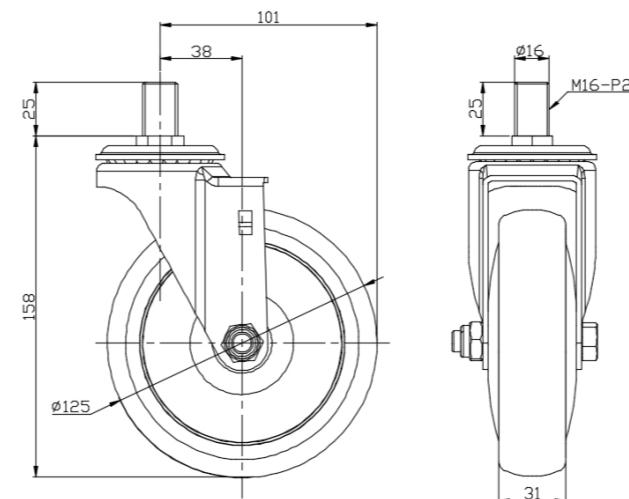

## Mounting

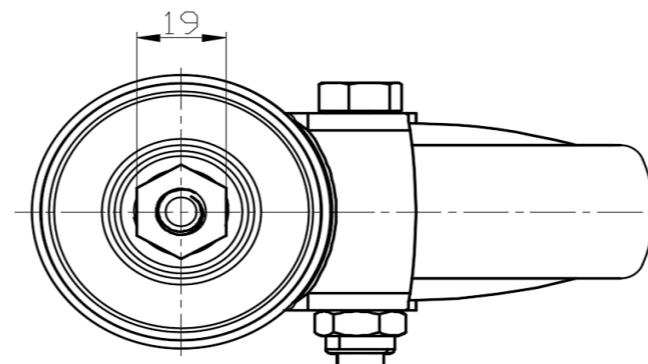

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com