

Wheel Diameter x Wheel Width 80 x 60mm

EAN

YJ-12033303236101

Provides excellent Floor Surface Preservation and wear resistance, with Low Noise Operation.

Has excellent Hydrolysis Resistance.

Suitable for tropical regions and humid working environments.

PU Red



Wheel Tread: cast iron core

Wheel Center: High-quality polyurethane

Bearing: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

#### Technical Data

Imperial  Metric

Wheel Diameter(D) 3-3/16 "

Wheel Width(T2) 2-7/16 "

Wheel Bearing Without Bearing

Axle Bore(d)

Axle Bore(S) 1-7/8 "

Bearing Bore Depth(t) 9/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1102lbs

Load Capacity (Static) 1653lbs

Temperature -4°F to +158°F

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.6lbs

Standard ISO22883


#### Advantages at a glance

Rolling Resistance ● ● ● ○ ○

Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

#### 2D Dimensional Drawing of Single Wheel

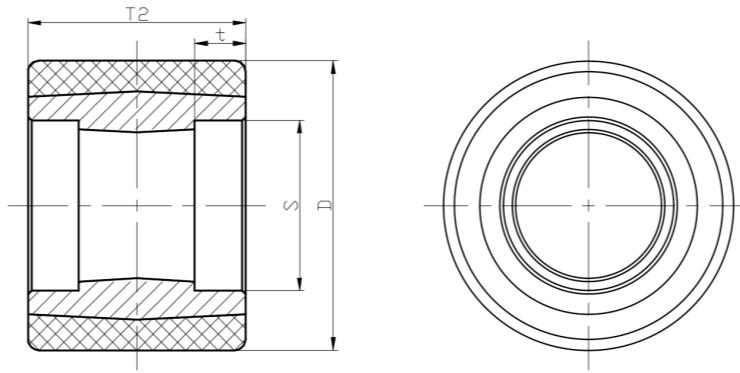

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com