

Wheel Diameter x Wheel Width 80 x 60mm

EAN


YJ-12033303236171

Provides excellent Floor Surface Preservation and wear resistance, with Low Noise Operation.

Has excellent Hydrolysis Resistance.

Suitable for tropical regions and humid working environments.

PU Red

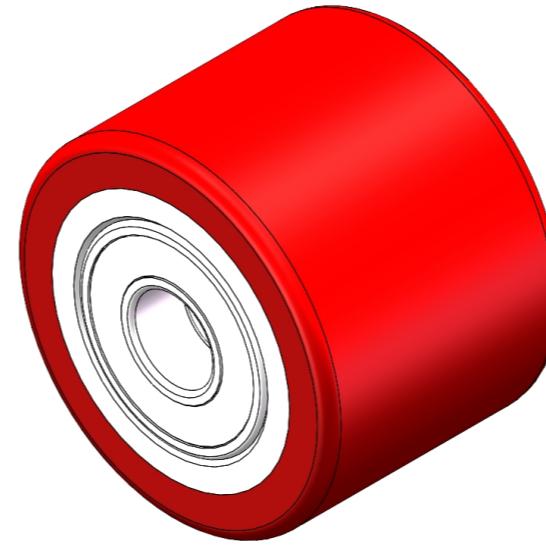

Wheel Tread: cast iron core

Wheel Center: High-quality polyurethane

Bearing: ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter(D) 80mm

Wheel Width(T2) 60mm

Wheel Bearing Ball Bearing

Axle Bore(d) 20mm

Axle Bore(S)

Bearing Bore Depth(t)

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 500kgs

Load Capacity (Static) 750kgs

Temperature -20°C to +70°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.95kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○

Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

2D Dimensional Drawing of Single Wheel

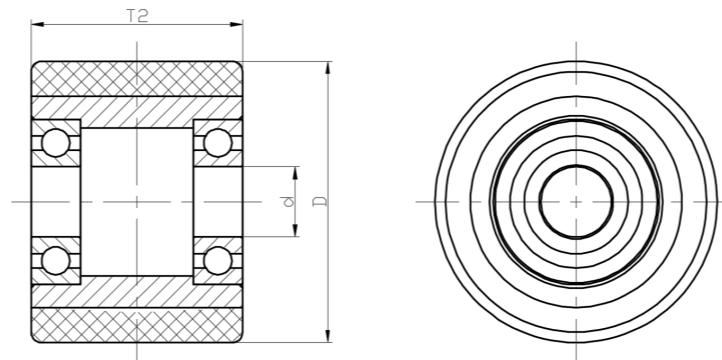

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com