

PU Series



wheel diameter × wheel width 70 x 70mm


EAN

YJ-12033303286301

It offers excellent Floor Surface Preservation and wear resistance, and operates with low noise.  
It possesses excellent Hydrolysis Resistance.  
Suitable for tropical regions and humid working environments.  
PU Red

Wheel Center: cast iron core  
Wheel Tread: High-quality polyurethane  
Bearings: —

Drawings are for reference only and may differ from the product

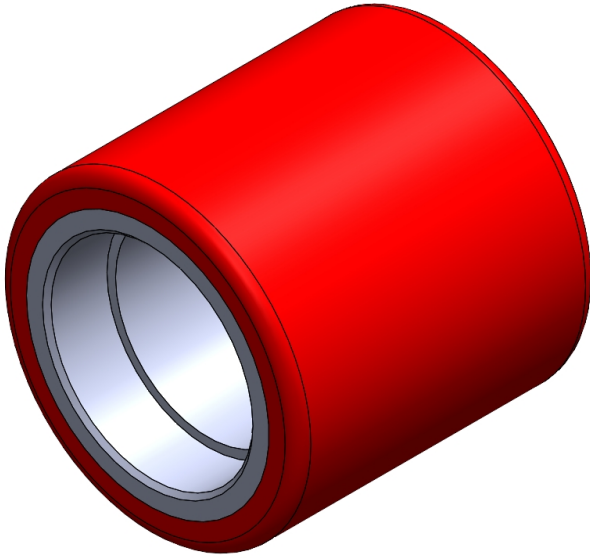

Picture may differ from original product


Technical Data

|                                                                        |                 |
|------------------------------------------------------------------------|-----------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                 |
| Wheel Diameter(D)                                                      | 2-13/16         |
| Wheel Width(T2)                                                        | 2-13/16 "       |
| Wheel Bearing                                                          | Without Bearing |
| Axle Bore(d)                                                           | —               |
| Axle Bore(S)                                                           | 1-7/8 "         |
| Bearing Bore Depth(t)                                                  | 9/16 "          |
| Hub Lenth(T1)                                                          | —               |
| Hardness Of Tread                                                      | 92±5° Shore A   |
| Load Capacity (Dynamic)                                                | 1323lbs         |
| Load Capacity (Static)                                                 | 1984lbs         |
| Temperature                                                            | -4°F to +158°F  |
| Electrical Conductivity                                                | N/A             |
| Anti-Static                                                            | N/A             |
| Weight                                                                 | 1.2lbs          |
| Standard                                                               | ISO22883        |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

2D Dimensional Drawing of Single Wheel

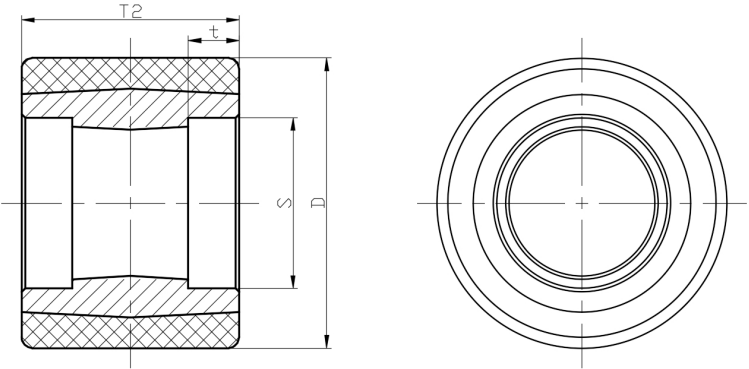

\* For any deviation between metric and imperial spec, please refer to the metric spec.