


## PU Series

Wheel Diameter x Wheel Width 100 x 34mm

EAN

YJ-12033304136701

Excellent Floor Surface Preservation, wear resistance, and low noise.  
Excellent Hydrolysis Resistance.  
Suitable for tropical and humid working environments.  
PU red, Wheel Tread profile: Crown

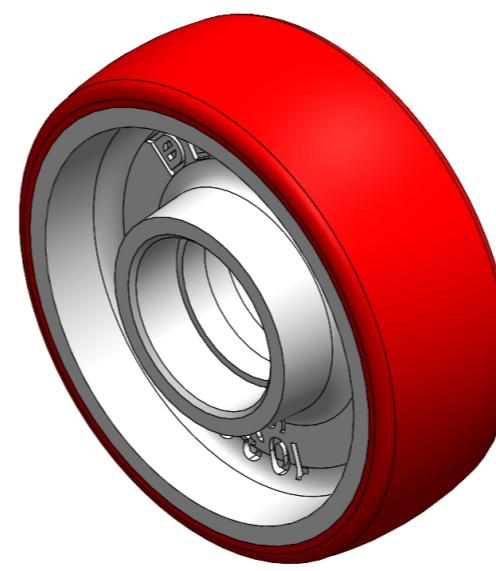

Wheel Tread: cast iron core  
Wheel Center: High-quality polyurethane  
Bearing: —

Drawings are for reference only and may differ from the product

Picture may differ from original product


### Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial
Wheel Diameter(D) 100mm
Wheel Width(T2) 34mm
Wheel Bearing Without Bearing
Axle Bore(d)
Axle Bore(S) 35mm
Bearing Bore Depth(t) 11mm
Hub Length(T1) 34mm
Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 320kgs
Load Capacity (Static) 480kgs
Temperature -20°C to +70°C
Electrical Conductivity N/A
Anti-Static N/A
Weight 0.63kgs
Standard ISO22883

### Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

### 2D Dimensional Drawing of Single Wheel

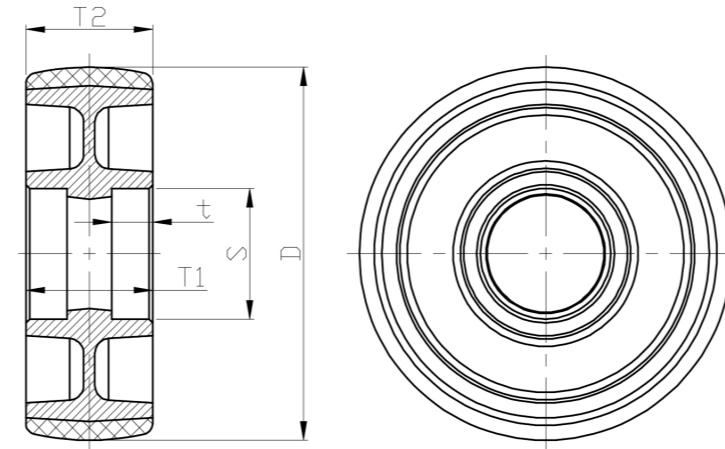

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com