


PU Series

Wheel Diameter x Wheel Width 100 x 34mm

EAN

YJ-12033304136701

Excellent Floor Surface Preservation, wear resistance, and low noise.
Excellent Hydrolysis Resistance.
Suitable for tropical and humid working environments.
PU red, Wheel Tread profile: Crown

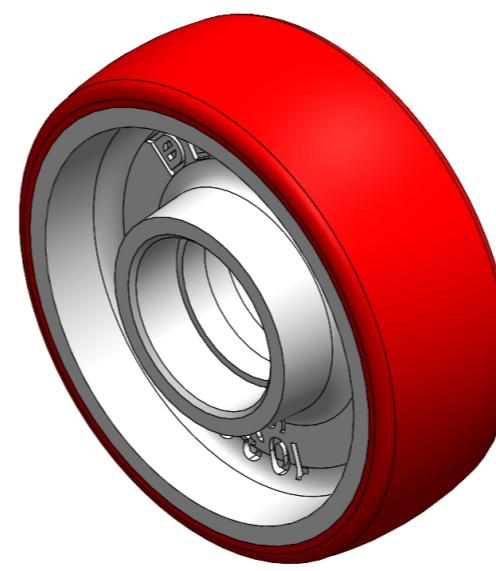

Wheel Tread: cast iron core
Wheel Center: High-quality polyurethane
Bearing: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter(D) 4 "

Wheel Width(T2) 1-3/8 "

Wheel Bearing Without Bearing

Axle Bore(d)

Axle Bore(S) 1-3/8 "

Bearing Bore Depth(t)

3/8 "

Hub Length(T1) 34

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 705lbs

Load Capacity (Static) 1058lbs

Temperature -4°F to +158°F

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.4lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○

Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

2D Dimensional Drawing of Single Wheel

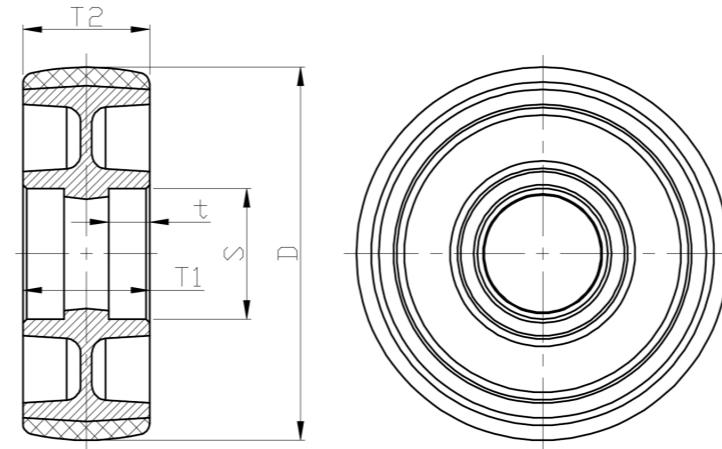

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com