


PU Series

Wheel Diameter x Wheel Width 127 x 42mm

EAN

YJ-12033305156501

Excellent Floor Surface Preservation and wear resistance, low noise.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
PU Red

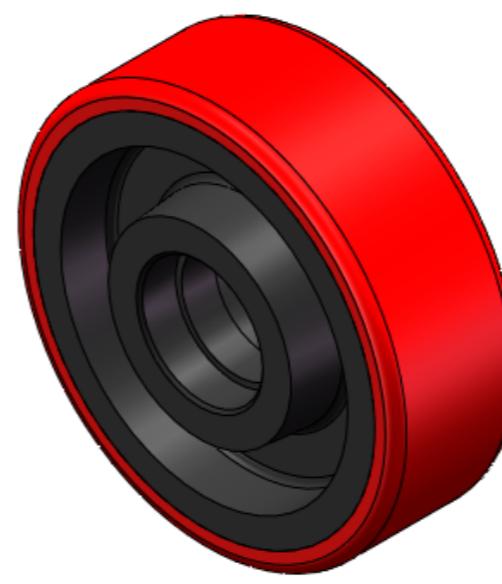

Wheel Center: casting
Wheel Tread: High-quality polyurethane
Bearings: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter(D) 127mm

Wheel Width(T2) 42mm

Wheel Bearing Without Bearing

Axle Bore(d) —

Axle Bore(S) 40mm

Bearing Bore Depth(t) 12mm

Hub Length(T1) 45mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +70°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.01kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○

Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

2D Dimensional Drawing of Single Wheel

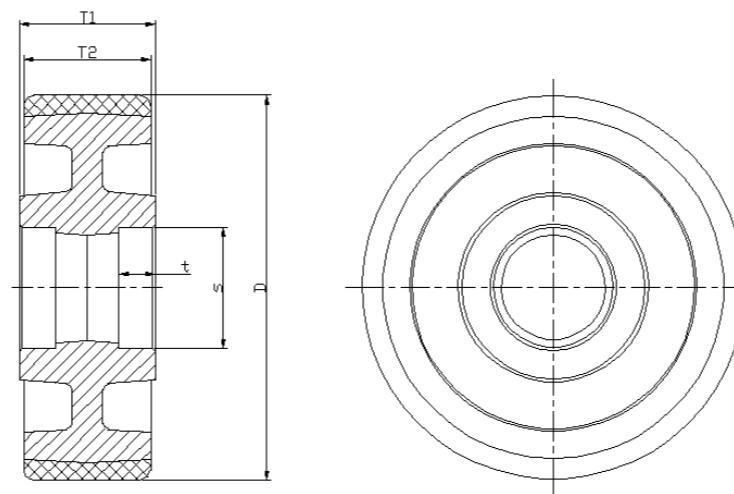

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com