


## PU Series

Wheel Diameter x Wheel Width 150 x 45mm

EAN

YJ-12033306186601

Excellent Floor Surface Preservation and wear resistance, low noise.  
Excellent Hydrolysis Resistance.  
Suitable for tropical regions and humid working environments.  
PU Red, Curved Wheel Surface

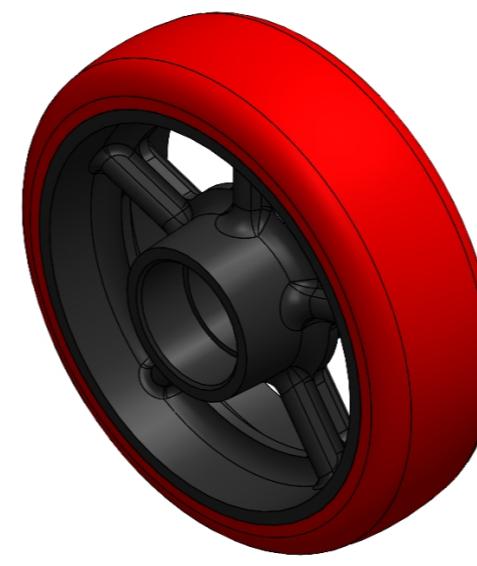

Wheel Center: cast iron core  
Wheel Tread: High-quality polyurethane  
Bearings: —

Drawings are for reference only and may differ from the product

Picture may differ from original product


### Technical Data

<input checked="" type="radio"/> Metric	<input type="radio"/> Imperial
Wheel Diameter(D)	150mm
Wheel Width(T2)	45mm
Wheel Bearing	Without Bearing
Axle Bore(d)	—
Axle Bore(S)	37mm
Bearing Bore Depth(t)	17mm
Hub Length(T1)	55mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	560kgs
Load Capacity (Static)	840kgs
Temperature	-20°C to +70°C
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.45kgs
Standard	ISO22883

### Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

### 2D Dimensional Drawing of Single Wheel

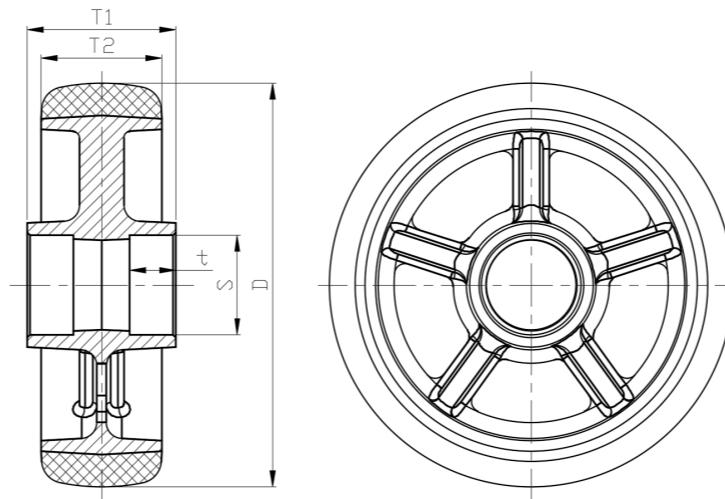

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational [www.dersheng.com](http://www.dersheng.com)