


PU Series

Wheel Diameter x Wheel Width 200 x 40mm

EAN

YJ-12033308156101

Excellent Floor Surface Preservation and wear resistance, low noise.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
PU Red

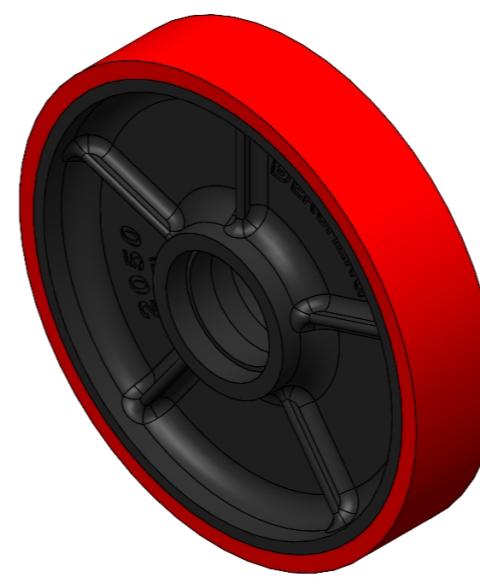

Wheel Tread: cast iron

Wheel Center: High-quality polyurethane

Bearings: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter(D) 200mm

Wheel Width(T2) 40mm

Wheel Bearing Without Bearing

Axle Bore(d) —

Axle Bore(S) 52mm

Bearing Bore Depth(t) 15mm

Hub Length(T1) 40mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 700kgs

Load Capacity (Static) 1050kgs

Temperature -20°C to +70°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.59kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○

Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ○ ○

2D Dimensional Drawing of Single Wheel

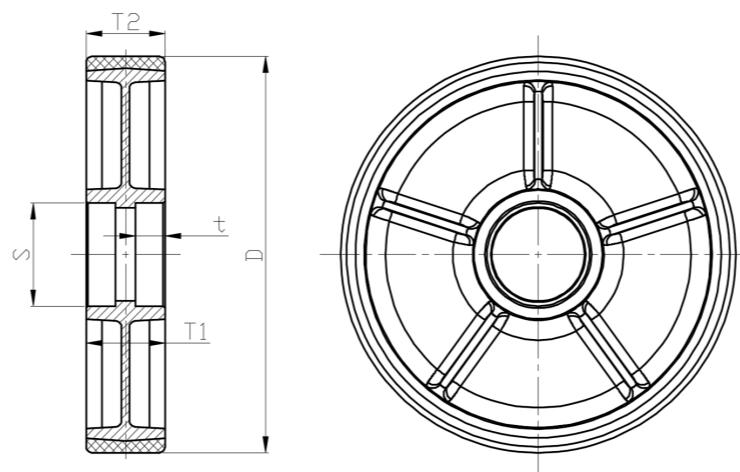

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com